

Breaking Deployed Crypto

The Side Channel Analyst's Way

Daniel Moghimi (@danielmgmi)


About Me

- Daniel Moghimi
@danielmgmi
- Security Researcher
- PhD Student @ WPI
 - Microarchitectural Security
 - Side Channels
 - Breaking Crypto Implementations
 - Trusted Execution Environment (Intel SGX)



Cryptanalysis

- Cryptosystem with an input m , output c , and secret k
- Attacker tries to learn k by looking at (m, c)

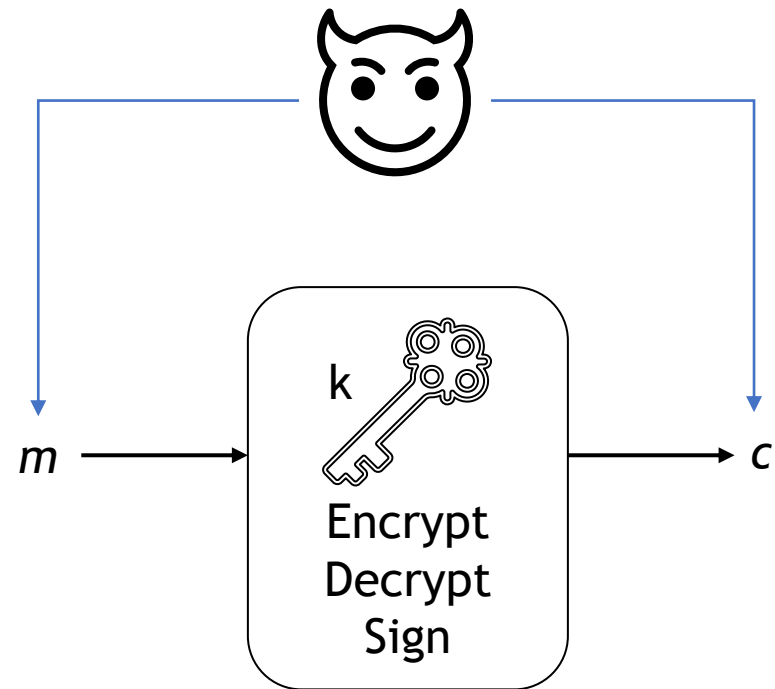

Cryptanalysis

- Cryptosystem with an input m , output c , and secret k
- Attacker tries to learn k by looking at (m, c)

ECDSA Sign:

$$(x_1, y_1) = k_i \times G$$

$$r_i = x_1 \bmod n$$

$$s_i = k_i^{-1}(z + r_i d) \bmod n$$

$$s_1 = k_1^{-1}(z + r_1 d) \bmod n$$

$$s_2 = k_2^{-1}(z + r_2 d) \bmod n$$



The screenshot shows the top portion of an Ars Technica article. The header includes the 'ars TECHNICA' logo, a 'SUBSCRIBE' button, and search and sign-in icons. The article is categorized under 'GAMING & CULTURE' and has the main title 'PS3 hacked through poor cryptography implementation'. The sub-headline reads: 'A group of hackers named fail0verflow revealed in a presentation how they ...'. The author is 'CASEY JOHNSTON' and the date is '12/30/2010, 12:25 PM'. The first paragraph of the article text is visible, starting with 'A group of hackers called fail0verflow claim they've figured out a way to get better control over a PlayStation 3 than ever before. After they worked through a number of Sony's security measures, they found the keystone to gaining access to the system's innards was the PS3's poor use of public key cryptography.'

Cryptanalysis

- Cryptosystem with an input m , output c , and secret k
- Attacker tries to learn k by looking at (m, c)

ECDSA Sign:

$$(x_1, y_1) = k_i \times G$$

$$r_i = x_1 \bmod n$$

$$s_i = k_i^{-1}(z + r_i d) \bmod n$$

$$k_1 = k_2 = k_n$$

$$s_1 = k^{-1}(z + r_1 d) \bmod n$$

$$s_2 = k^{-1}(z + r_2 d) \bmod n$$



The screenshot shows the top portion of an Ars Technica article. The header includes the 'ars TECHNICA' logo, a 'SUBSCRIBE' button, and search and sign-in icons. The article is categorized under 'GAMING & CULTURE' and has the main title 'PS3 hacked through poor cryptography implementation'. The sub-headline reads: 'A group of hackers named fail0verflow revealed in a presentation how they ...'. The author is 'CASEY JOHNSTON' and the date is '12/30/2010, 12:25 PM'. The main text begins with: 'A group of hackers called fail0verflow claim they've figured out a way to get better control over a PlayStation 3 than ever before. After they worked through a number of Sony's security measures, they found the keystone to gaining access to the system's innards was the PS3's poor use of public key cryptography.'

Cryptanalysis

- Cryptosystem with an input m , output c , and secret k
- Attacker tries to learn k by looking at (m, c)

ECDSA Sign:

$$(x_1, y_1) = k_i \times G$$

$$r_i = x_1 \bmod n$$

$$s_i = k_i^{-1}(z + r_i d) \bmod n$$

$$k_1 = k_2 = k_n$$

$$s_1 = k^{-1}(z + r_1 d) \bmod n$$

$$s_2 = k^{-1}(z + r_2 d) \bmod n$$



$$s_2 - s_1 = (r_2 - r_1) d \bmod n$$



The screenshot shows the top portion of an Ars Technica article. The header includes the 'ars TECHNICA' logo, a 'SUBSCRIBE' button, and search and sign-in options. The article is categorized under 'GAMING & CULTURE' and has the title 'PS3 hacked through poor cryptography implementation'. The text of the article begins with 'A group of hackers named fail0verflow revealed in a presentation how they ...' and is attributed to 'CASEY JOHNSTON - 12/30/2010, 12:25 PM'. A short paragraph of the article is visible at the bottom of the screenshot, discussing the hackers' findings on Sony's security measures.

Side-Channel Cryptanalysis

- Cryptosystem with an input m , output c , and secret k
- Attacker tries to learn k by looking at (m, c) and signal s

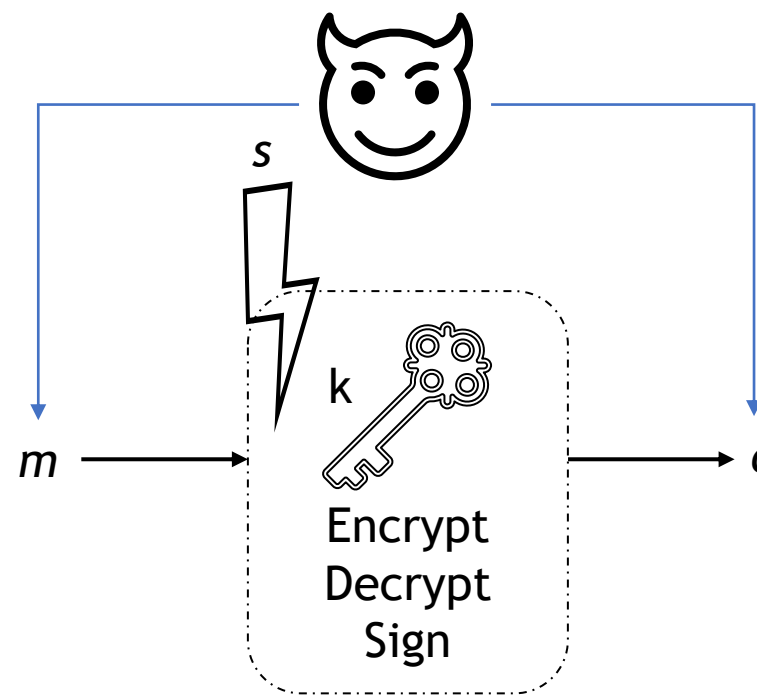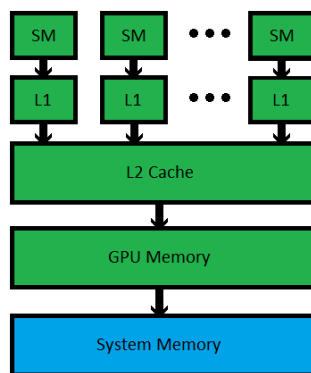


Side-Channel Attacks

- Channels


- Power Analysis
- EM Analysis
- ...
- *Timing Analysis*
- *CPU Side Channels*

- Threat Models:


- Physical Access
- *Local Access (Co-location)*
- *Remote*

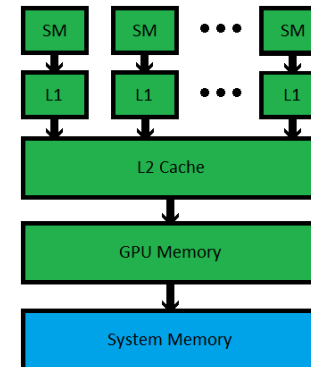

Secure Elements

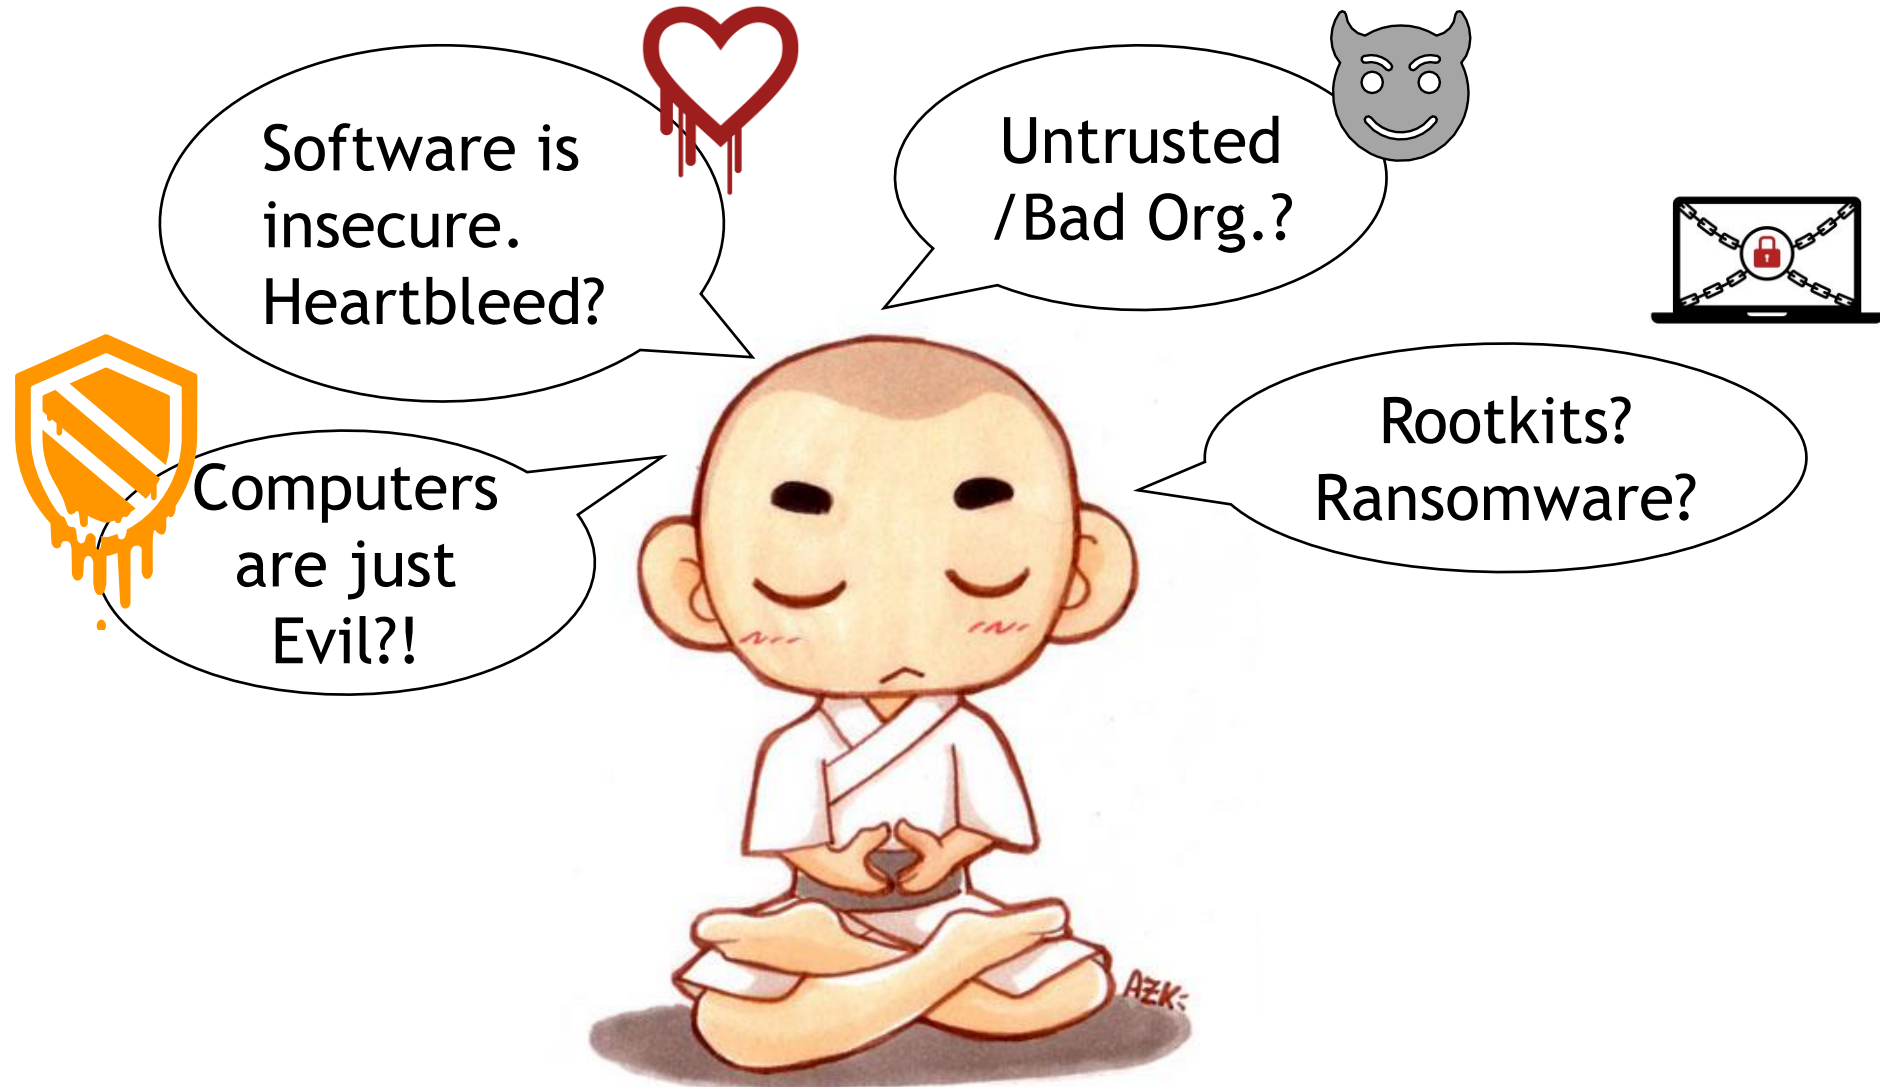


Secure Elements

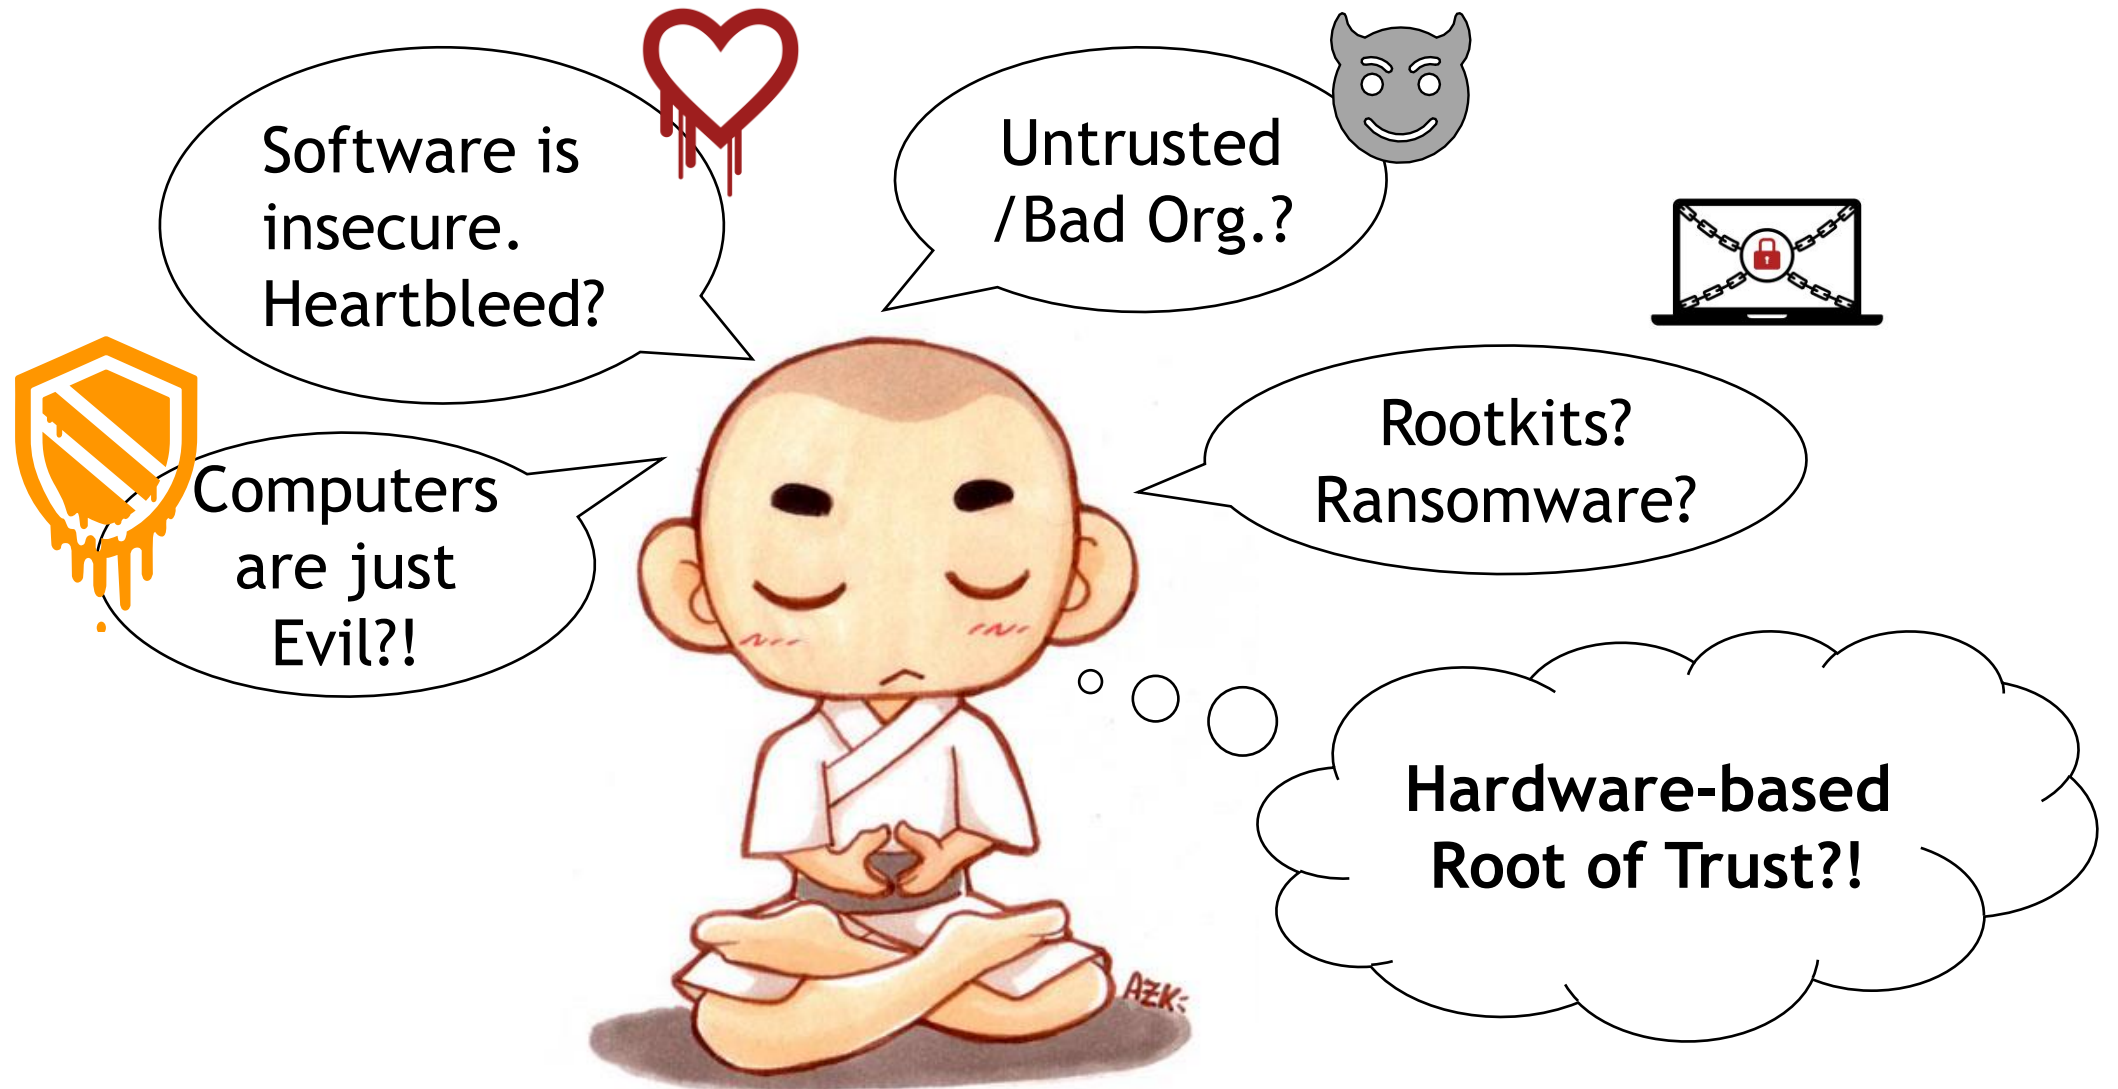



Trusted Platform Module (TPM)

- Security Chip for Computers?
- Tamper Resistant
- Side-Channel Resistant
- Crypto Co-processor

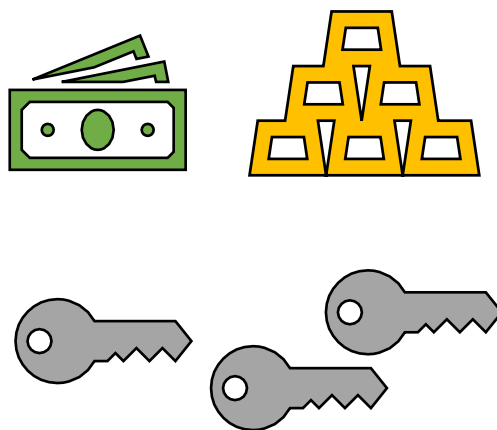


Trusted Platform Module (TPM)

- Security Chip for Computers?
- Tamper Resistant
- Side-Channel Resistant
- Crypto Co-processor

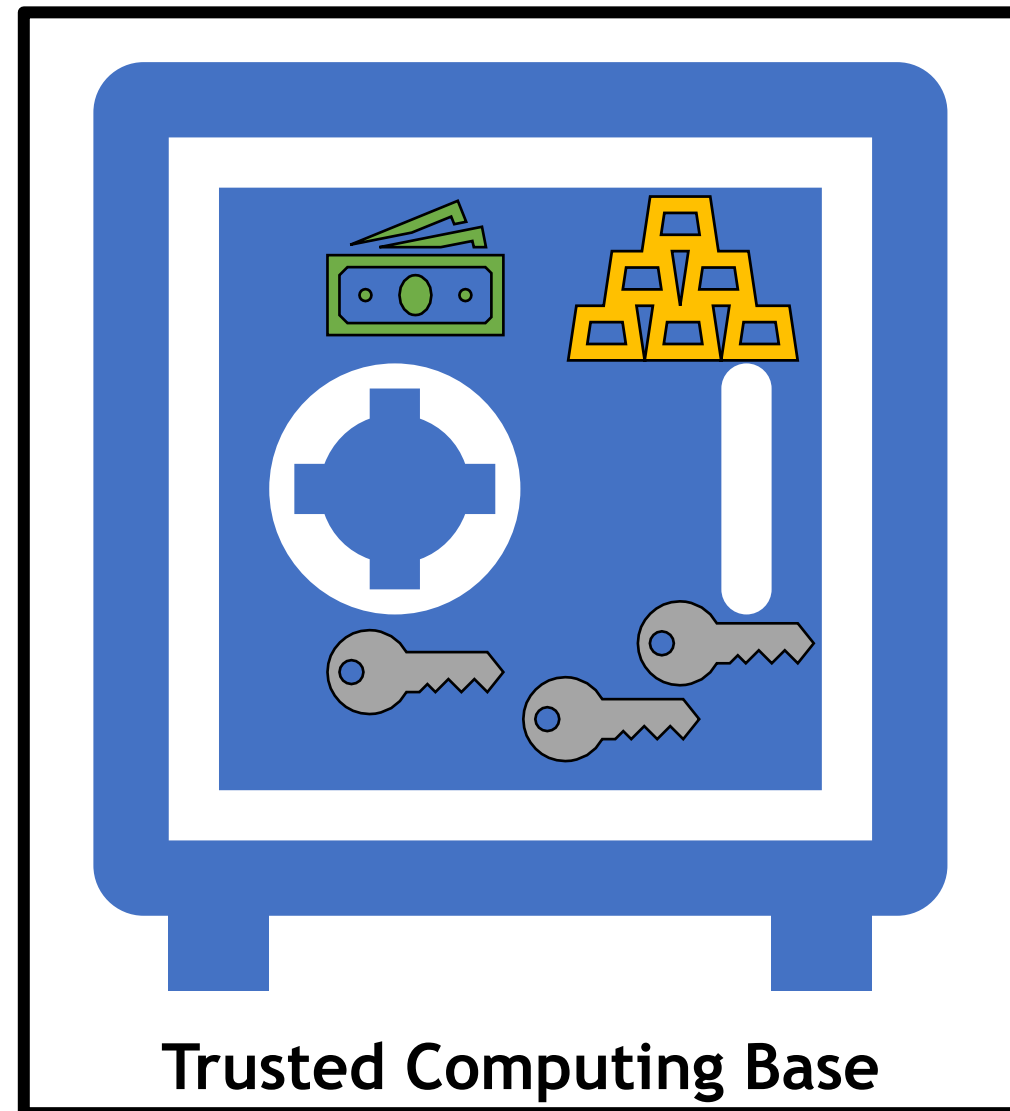

Trusted Platform Module (TPM)


- Cryptographic Co-processor, specified by **Trusted Computing Group**
 - Secure Storage
 - Integrity Measurement
 - TRNG
 - Hash Functions
 - Encryption
 - **Digital Signatures**

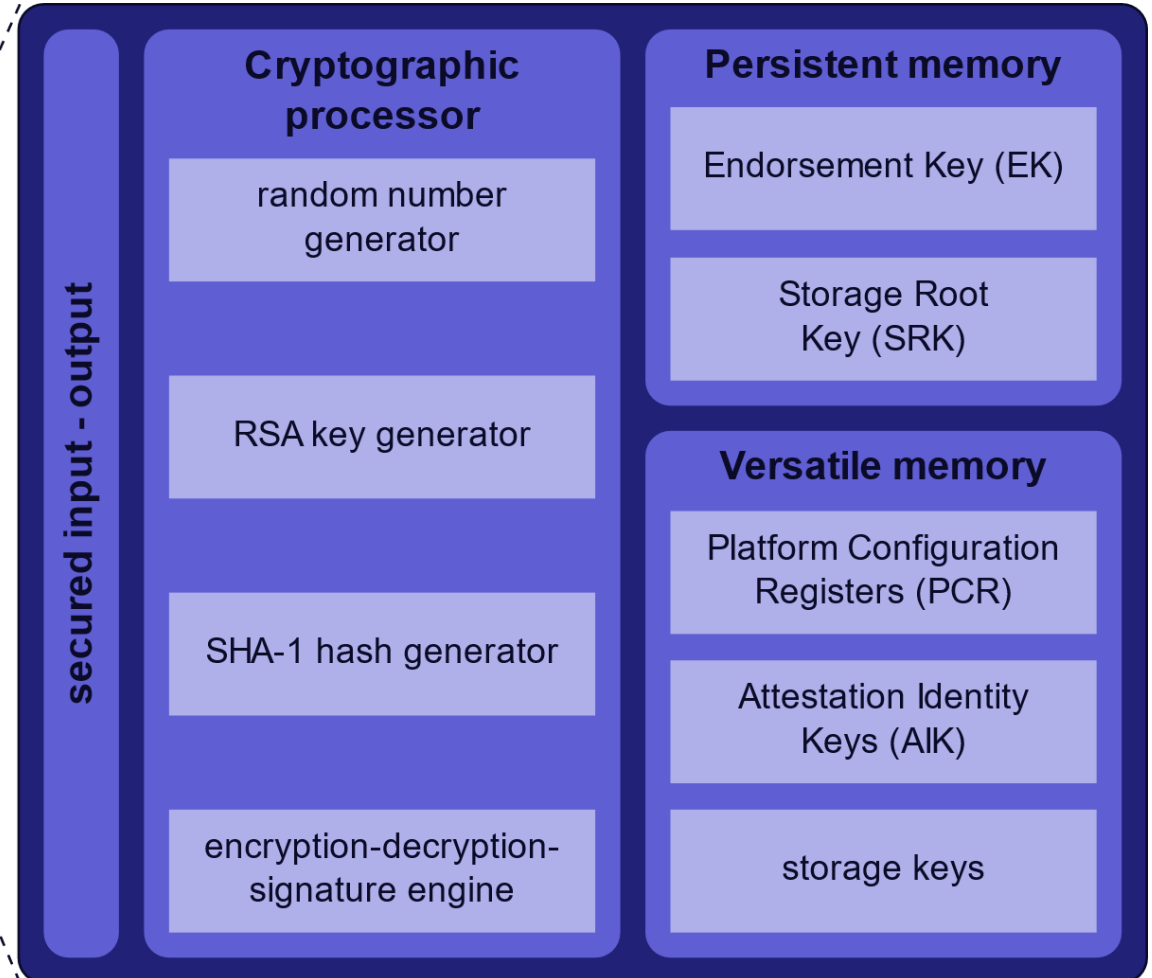

TPM - Digital Signatures

- Applications
 - Trusted Execution of Signing Operations
 - Remote Attestation
- TPM 2.0 supports Elliptic-Curve Digital Signature
 - ECDSA
 - ECSchnorr
 - ECDAA (Anonymous Remote Attestation)

OpenSSL
Cryptography and SSL/TLS Toolkit



Trusted Computing Group

- <https://trustedcomputinggroup.org/membership/certification/>

- <https://trustedcomputinggroup.org/membership/certification/tpm-certified-products/>

+ TPM Security Evaluation

TCG members are required to demonstrate successful Common Criteria certification of their TPM product.

For the TPM 1.2 Family, the Common Criteria Security Assurance Level is at **EAL4+** Moderate, in accordance to the PC Client TPM 1.2 Protection Profile by the TCG.

For the **TPM 2.0** Family, the Common Criteria Security Assurance Level is at **EAL4+** Moderate, in accordance to the PC Client TPM 2.0 Protection Profile by the TCG.

TPM Certified Products

Company Name	Product Name	Product Revision	Specification	Details	Security Evaluation	Cert. Status	Cert. Complete Date
STMicroelectronics	TPM ST33TPHF2X	1.256, 1.257, 2.256	Version 2.0 - Revision 1.38		Completed	Completed	2019.10.18
STMicroelectronics	TPM ST33GTPMA	3.256, 6.526	Version 2.0 - Revision 1.38		Completed	Completed	2019.10.18
Nuvoton Technologies Corporation (NTC)	TPM NPCT75x	7.4.0.0	Version 1.2 - Revision 116		Complete	Complete	2019.08.14
Nuvoton Technologies Corporation (NTC)	TPM NPCT75x	7.2.1.0	Version 2.0 - Revision 1.38		Complete	Complete	2019.01.18
Infineon Technologies	TPM SLI9670 TPM SLM9670	13.11	Version 2.0 - Revision 1.38		Complete	Complete	2018.12.18
Infineon Technologies	TPM SLB9670	7.85	Version 2.0 -		Complete	Complete	2018.10.29



Are TPMs really
side-channel
resistant?

High-resolution Timing Test

- TPM frequency \approx 32-120 MHz
- CPU Frequency is more than 2 GHz




100x faster!!



slow & steady!



High-resolution Timing Test - Intel PTT (fTPM)

- Intel Platform Trust Technology (PTT)
 - Integrated firmware-TPM inside the CPU package
 - Runs on top of Converged Security and Management Engine (CSME)
 - Standalone low power processor
 - Has been around since Haswell

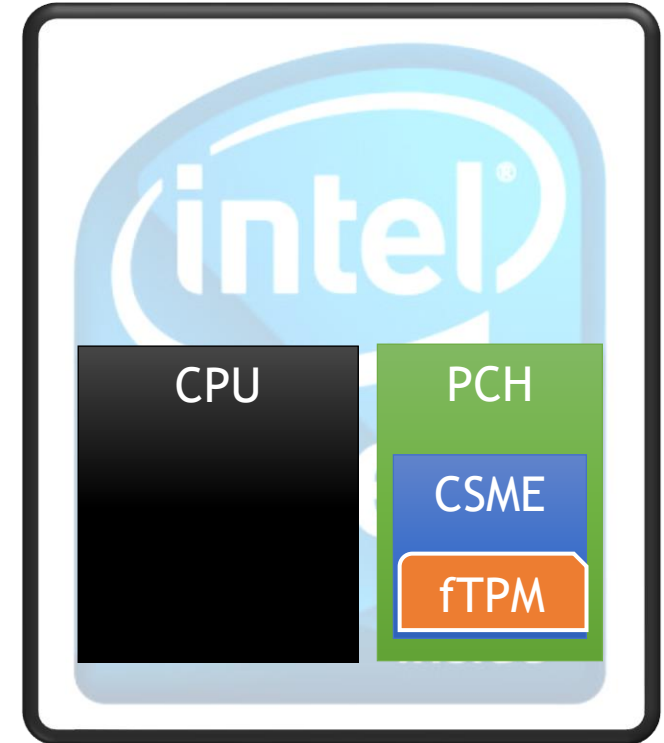

High-resolution Timing Test - Intel PTT (fTPM)



- Intel Platform Trust Technology (PTT)
 - Integrated firmware-TPM inside the CPU package
 - Runs on top of Converged Security and Management Engine (CSME)

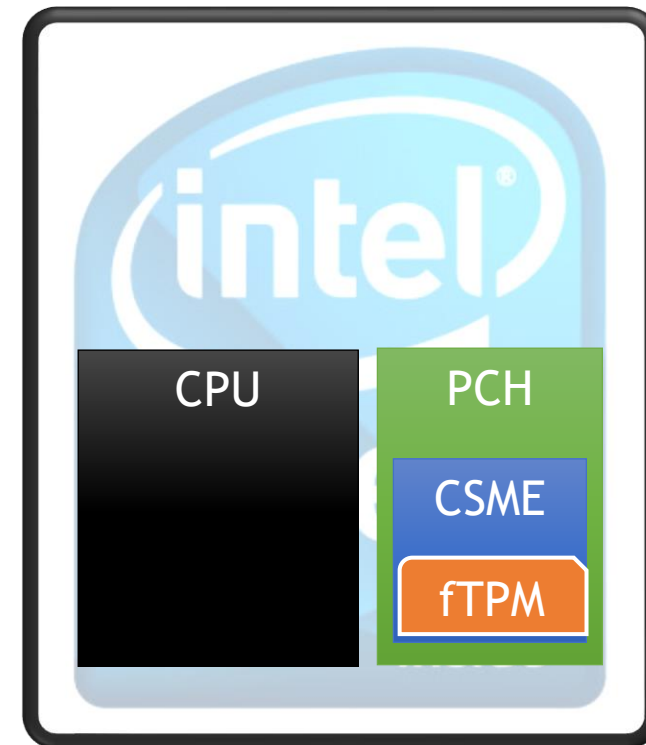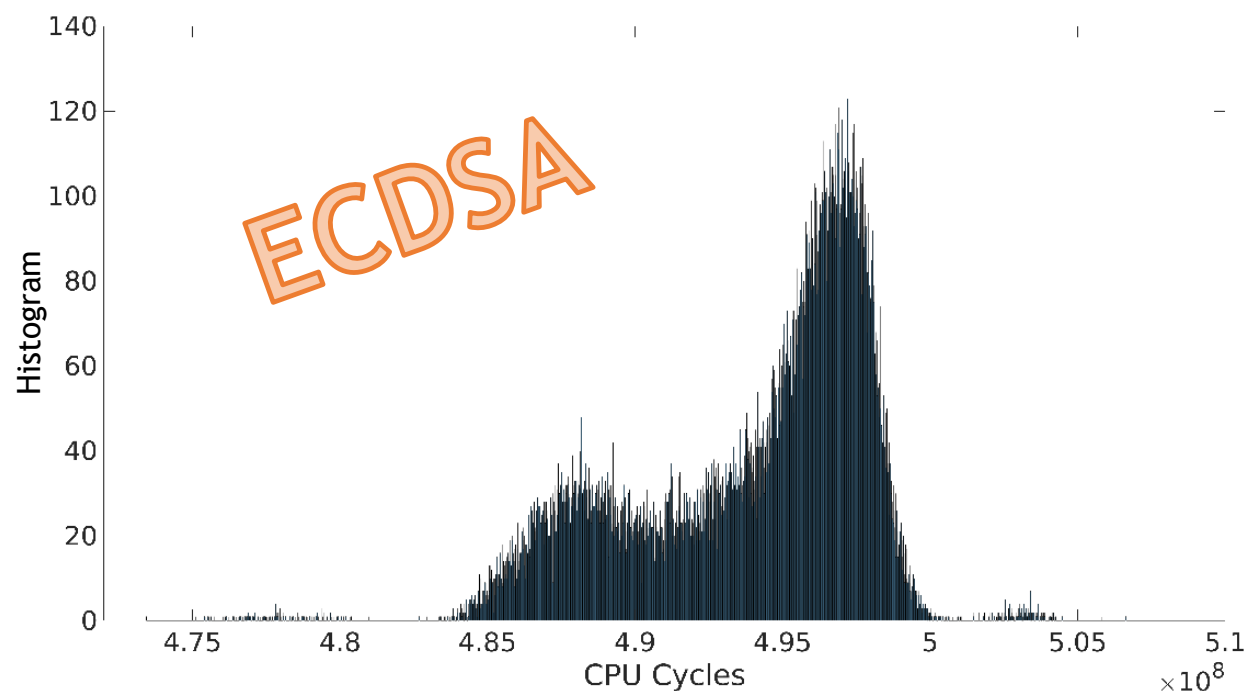

High-resolution Timing Test - Intel PTT (fTPM)

- Linux TPM Command Response Buffer (CRB) driver
- Kernel Driver to increase the Resolution

```
t = rdtsc ();  
iowrite32 (CRB_START_INVOKE, &g_priv->regs_t->ctrl_start);  
while (( ioread32(&g_priv->regs_t->ctrl_start) &  
        CRB_START_INVOKE) == CRB_START_INVOKE);  
tscrequest [ requestcnt ++] = rdtsc () - t;
```

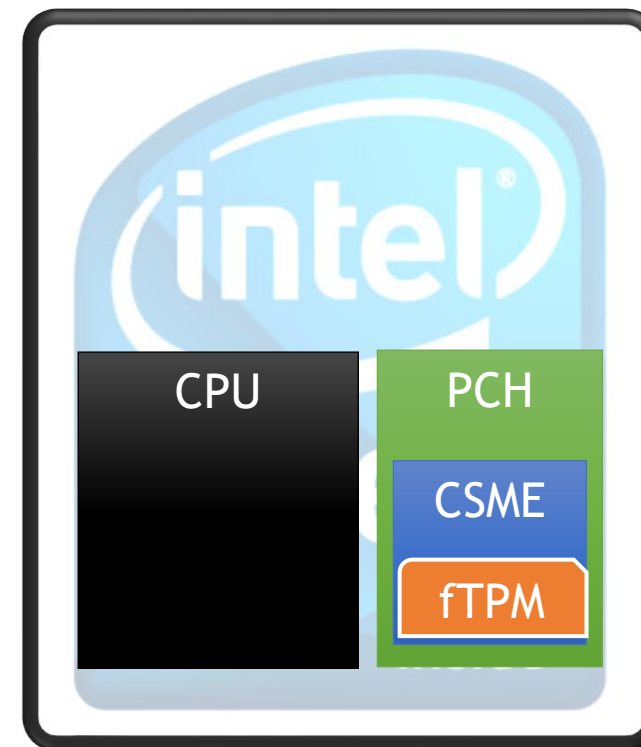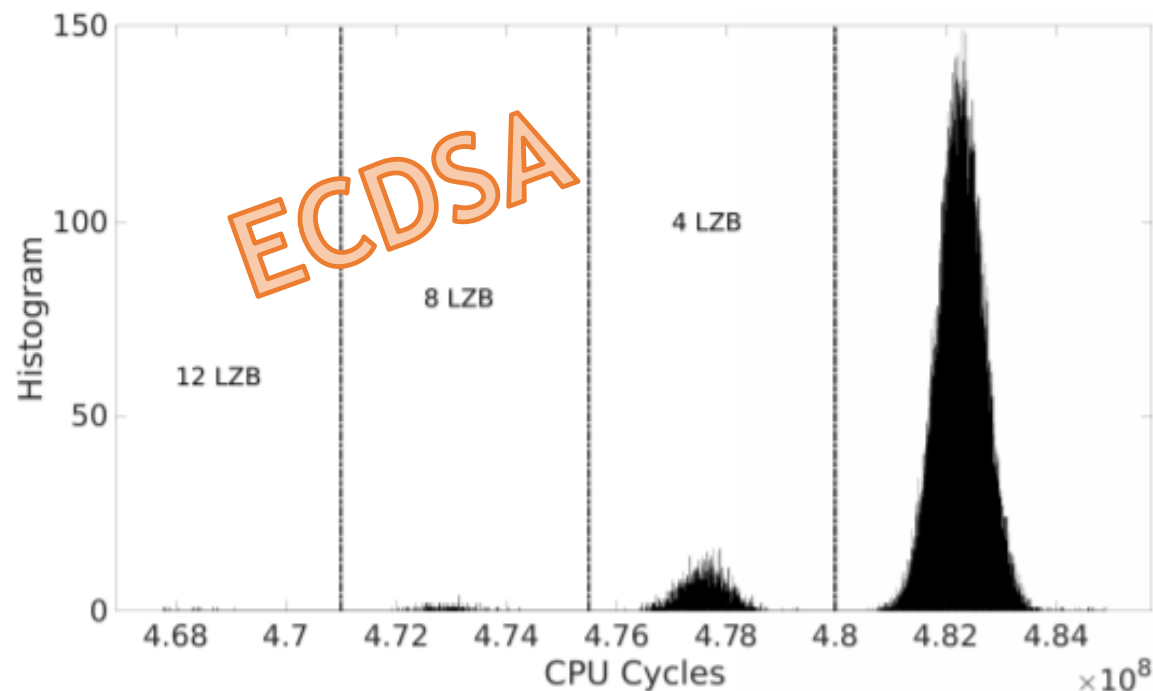

High-resolution Timing Test - Analysis

- RSA and ECDSA timing test on 3 dedicated TPM and Intel fTPM
- Various non-constant behaviour for both RSA and ECDSA

Machine	CPU	Vendor	TPM	Firmware/Bios
NUC 8i7HNK	Core i7-8705G	Intel	PTT (fTPM)	NUC BIOS 0053
NUC 7i3BNK	Core i3-7100U	Intel	PTT (fTPM)	NUC BIOS 0076
Asus GL502VM	Core i7-6700HQ	Intel	PTT (fTPM)	Latest OEM
Asus K501UW	Core i7 6500U	Intel	PTT (fTPM)	Latest OEM
Dell XPS 8920	Core i7-7700	Intel	PTT (fTPM)	Dell BIOS 1.0.4
Dell Precision 5510	Core i5-6440HQ	Nuvoton	rls NPCT	NTC 1.3.2.8
Lenovo T580	Core i7-8650U	STMicro	ST33TPHF2ESPI	STMicro 73.04
NUC 7i7DNKE	Core i7-8650U	Infineon	SLB 9670	NUC BIOS 0062

High-resolution Timing Test - ECDSA Nonce

- Intel fTPM: 4-bit Window Nonce Length Leakage
 - ECDSA
 - ECSChnorr
 - BN-256 (ECDAA)

Nonce

0101000100111111...111

0000100100111111...111

1101000100111111...111

0000000000111111...111

0000000000001111...111



High-resolution Timing Test - ECDSA Nonce

- Intel fTPM: 4-bit Window Nonce Length Leakage

- ECDSA
- ECSCNorr
- BN-256 (ECDAA)



Nonce

0101000100111111...111

0000100100111111...111

1101000100111111...111

0000000000111111...111


0000000000001111...111



High-resolution Timing Test - ECDSA Nonce

- Intel fTPM: 4-bit Window Nonce Length Leakage

- ECDSA
- EC Schnorr
- BN-256 (ECDAA)

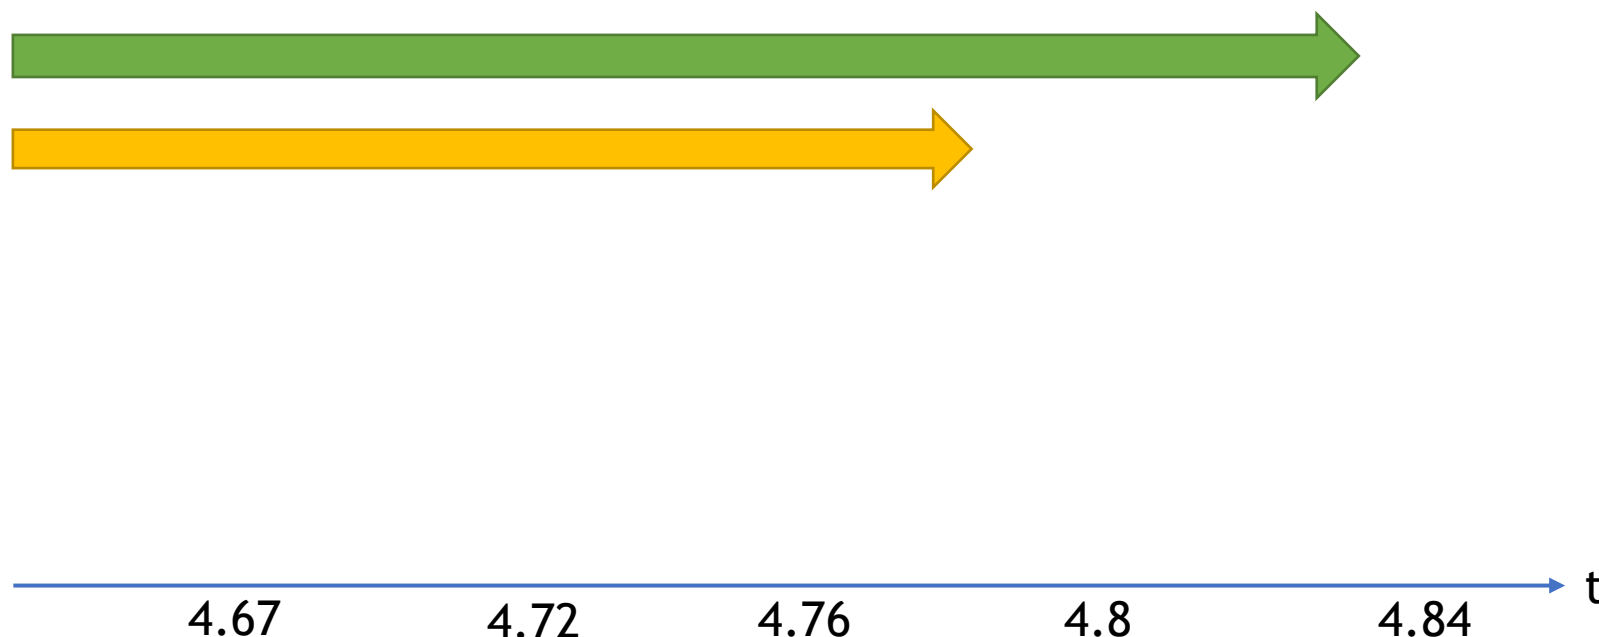


Nonce

- 0101000100111111...111
- 0000100100111111...111
- 1101000100111111...111
- 000000000111111...111
- 000000000001111...111

High-resolution Timing Test - ECDSA Nonce

- Intel fTPM: 4-bit Window Nonce Length Leakage

- ECDSA
- EC Schnorr
- BN-256 (ECDAA)

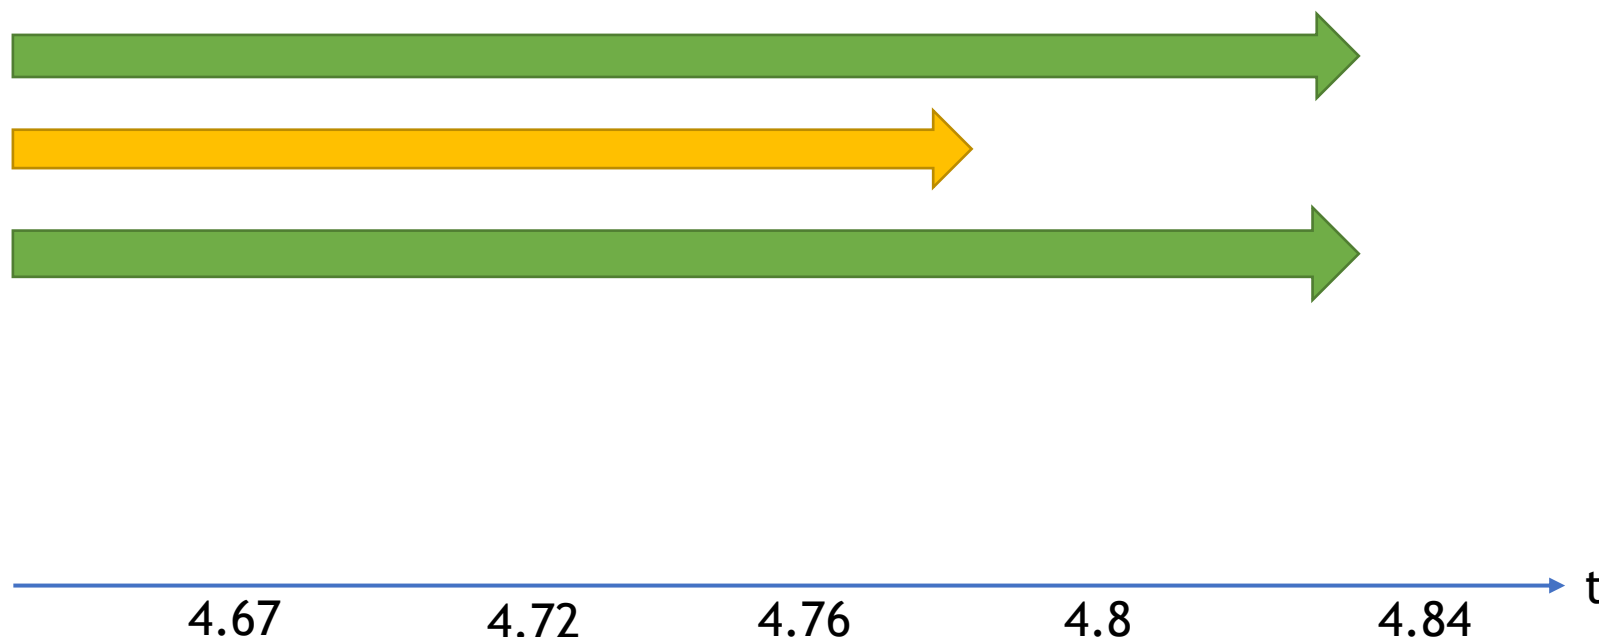

Nonce

0101000100111111...111

0000100100111111...111

1101000100111111...111


0000000001111111...111

0000000000001111...111

High-resolution Timing Test - ECDSA Nonce

- Intel fTPM: 4-bit Window Nonce Length Leakage

- ECDSA
- EC Schnorr
- BN-256 (ECDAA)

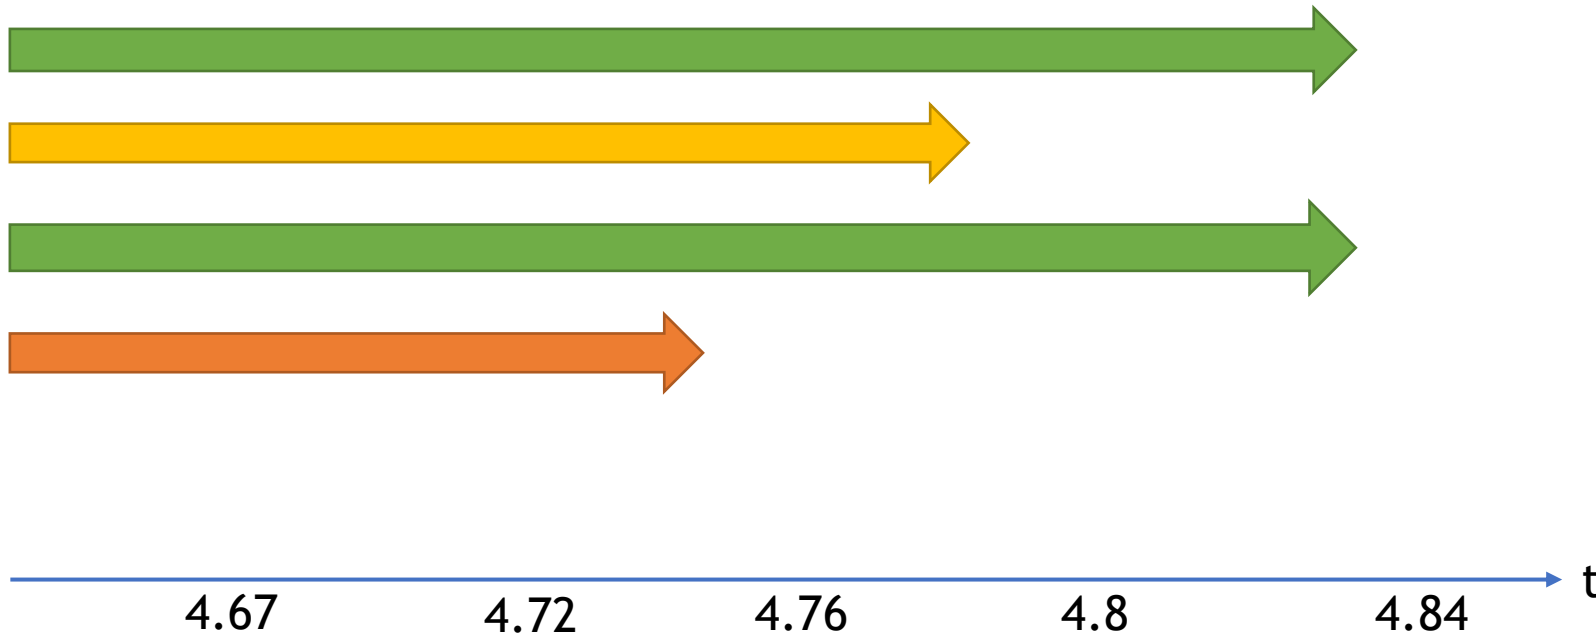


Nonce

0101000100111111...111
0000100100111111...111
1101000100111111...111
0000000000111111...111
0000000000001111...111

High-resolution Timing Test - ECDSA Nonce

- Intel fTPM: 4-bit Window Nonce Length Leakage

- ECDSA
- EC Schnorr
- BN-256 (ECDAA)

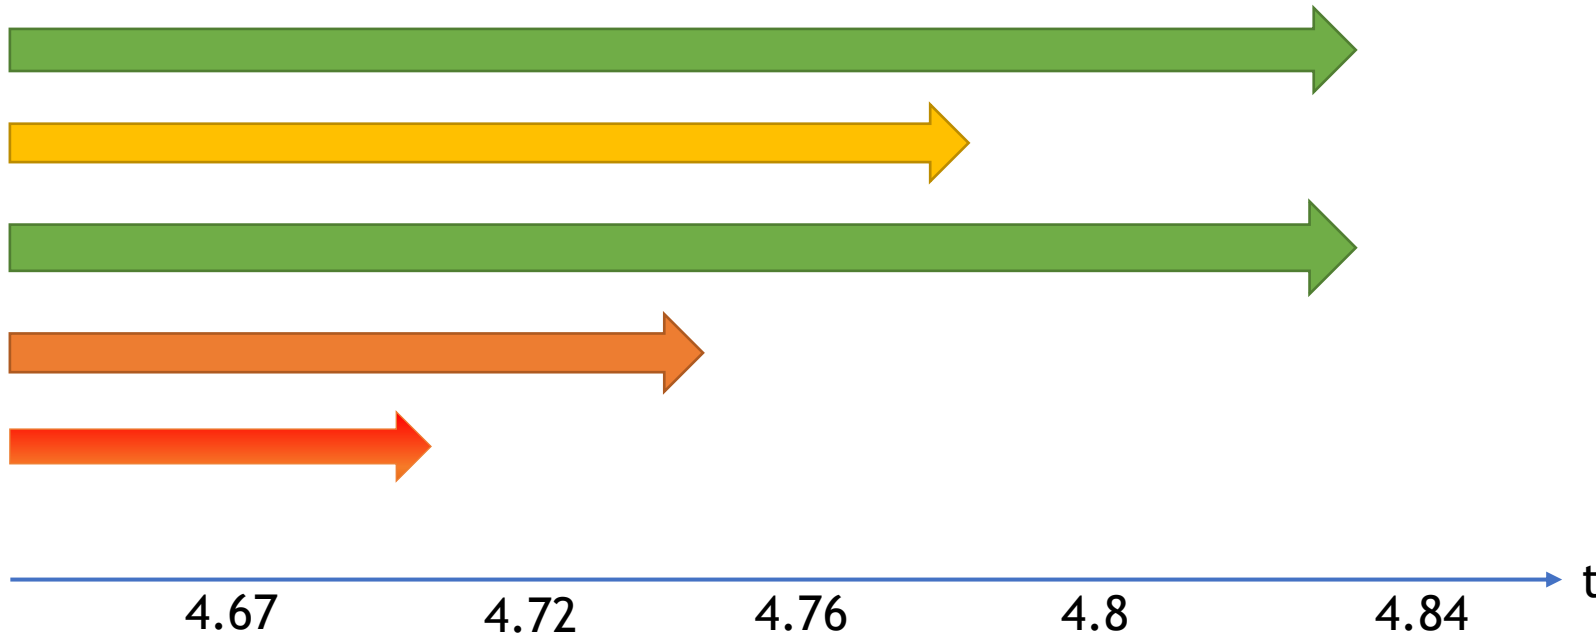


Nonce

0101000100111111...111
0000100100111111...111
1101000100111111...111
0000000000111111...111
0000000000001111...111

High-resolution Timing Test - ECDSA Nonce

- Intel fTPM: 4-bit Window Nonce Length Leakage

- ECDSA
- EC Schnorr
- BN-256 (ECDAA)

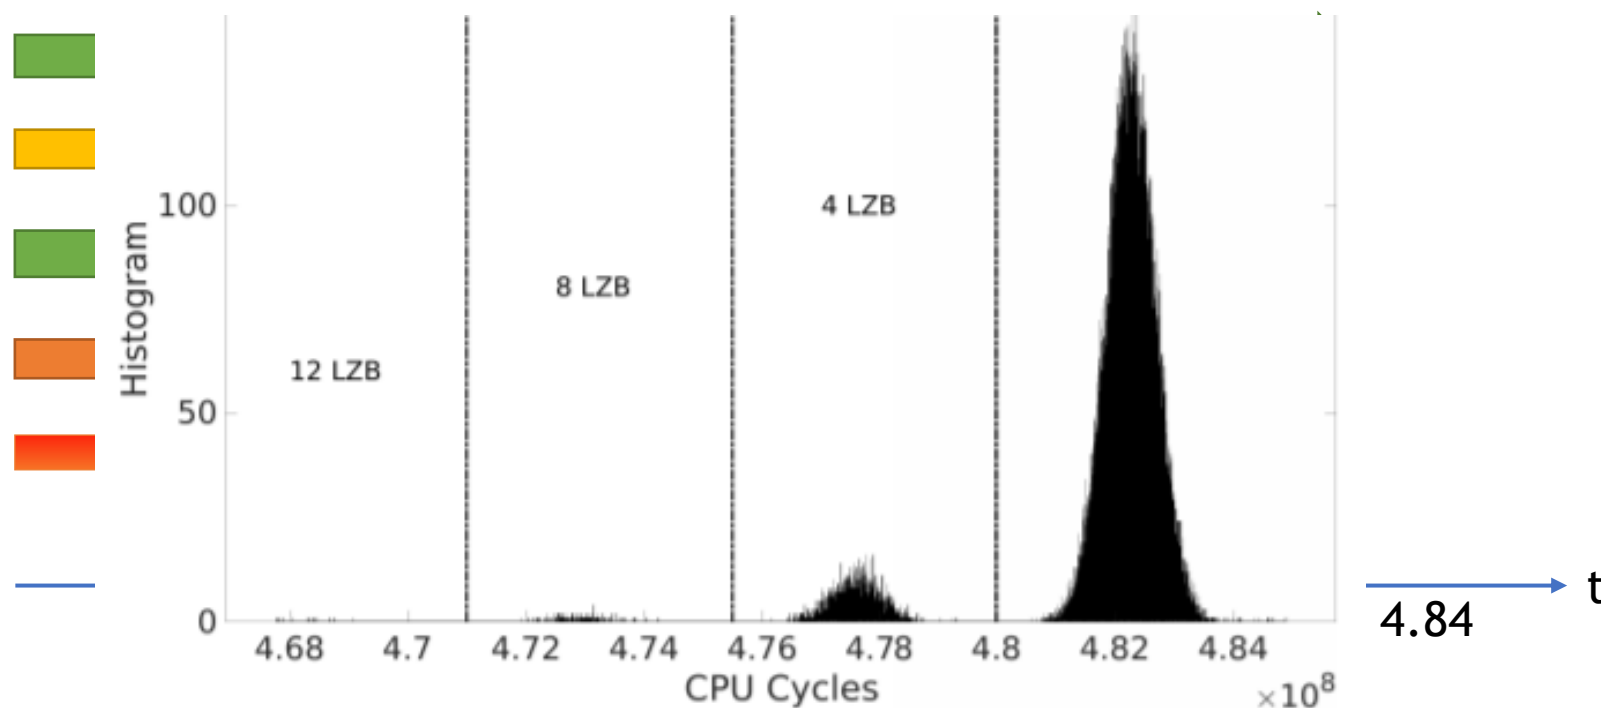

Nonce

0101000100111111...111


0000100100111111...111

1101000100111111...111

0000000000111111...111




0000000000001111...111

STMicro - ECDSA

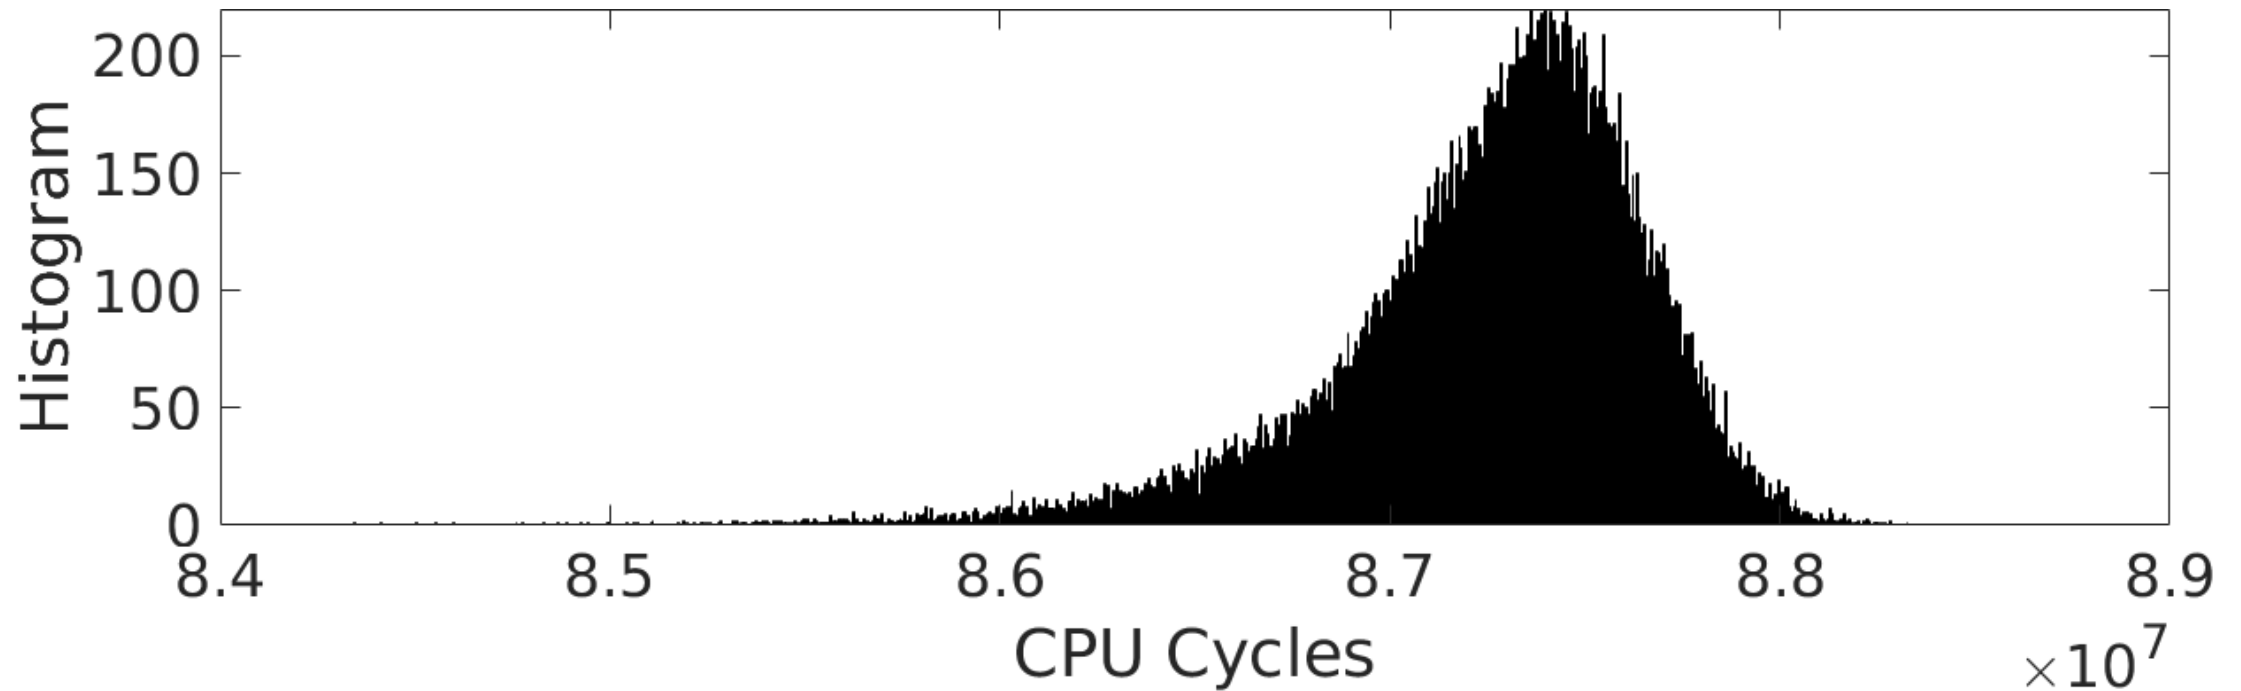

High-resolution Timing Test - ECDSA Nonce

- Intel fTPM: 4-bit Window Nonce Length Leakage
- STMicro TPM: Bit-by-Bit Nonce Length Leakage

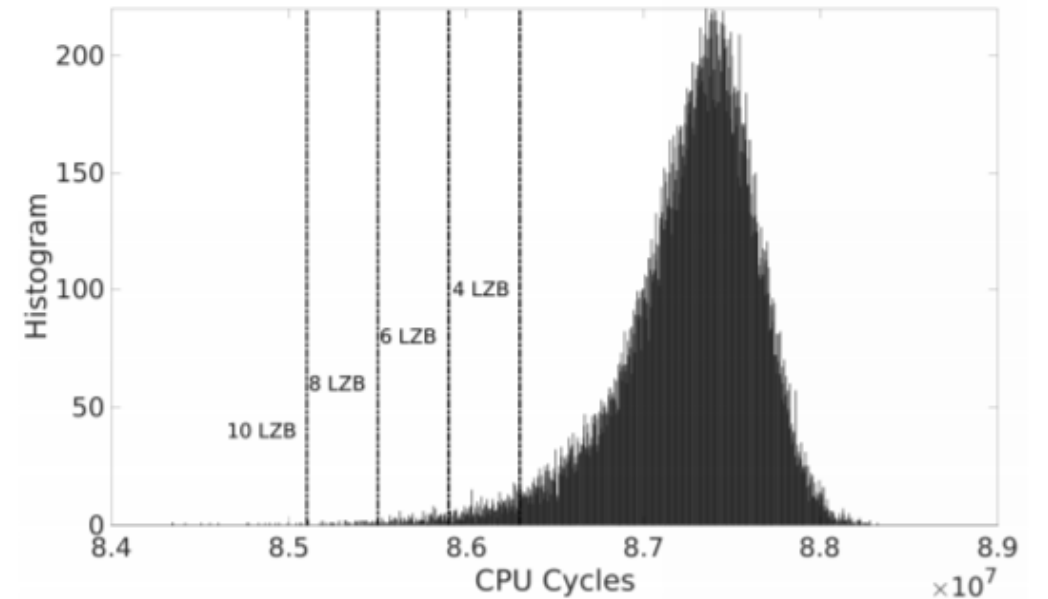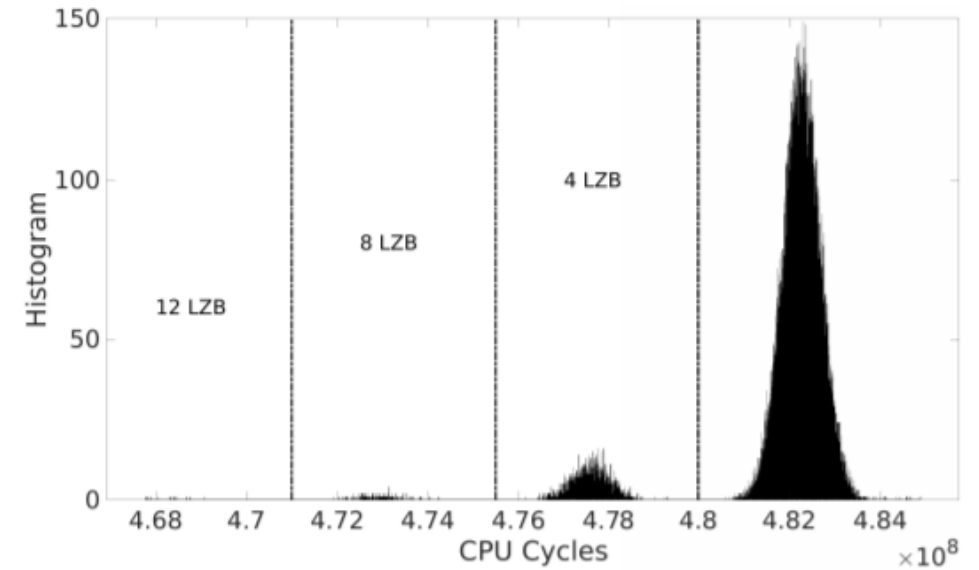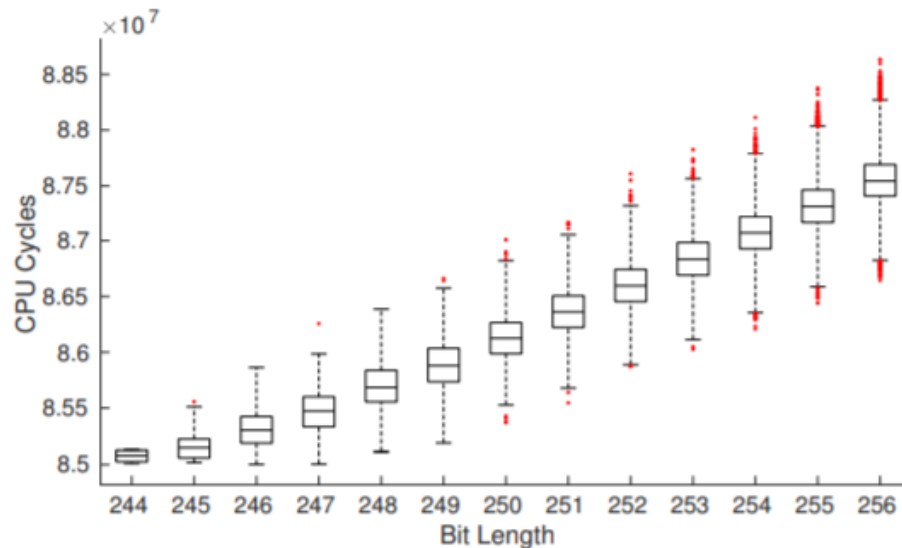

TPM-Fail - Recovering Private ECDSA Key

- TPM is programmed with an unknown key
 - We already have a template for t_i .
1. Collect list of signatures (r_i, s_i) and timing samples t_i .
 2. Filter signatures based on t_i and keeps (r_i, s_i) with a known bias.
 3. Lattice-based attack to recover private key d , from signatures with biased nonce k_i .

Lattice and Hidden Number Problem

- $s = k^{-1}(z + dr) \bmod n$

Lattice and Hidden Number Problem

- $s = k^{-1}(z + dr) \pmod n \rightarrow k_i^{-1} - s_i^{-1}r_i d - s_i^{-1}z \equiv 0 \pmod n$

Lattice and Hidden Number Problem

- $s = k^{-1}(z + dr) \pmod n \rightarrow k_i^{-1} - s_i^{-1}r_i d - s_i^{-1}z \equiv 0 \pmod n$
- $A_i = -s_i^{-1}r_i, B_i = -s_i^{-1}z \rightarrow k_i + A_i d + B_i = 0$

Lattice and Hidden Number Problem


- $s = k^{-1}(z + dr) \pmod n \rightarrow k_i^{-1} - s_i^{-1}r_i d - s_i^{-1}z \equiv 0 \pmod n$
- $A_i = -s_i^{-1}r_i, B_i = -s_i^{-1}z \rightarrow k_i + A_i d + B_i = 0$
- Let X be the upper bound on k_i and $(d, k_0, k_1, \dots, k_n)$ is unknown


Boneh and Venkatesan[1]

TPM-Fail - Key Recovery Results

- Intel fTPM
 - ECDSA, ECSchnorr and BN-256 (ECDAA)
 - Three different threat model System, User, Network
- STMicroelectronics TPM
 - CC EAL4+ Certified
 - Give you the key in 80 minutes

Threat Model	TPM	Scheme	#Sign.	Time
Local System	ST TPM	ECDSA	39,980	80 mins
Local System	fTPM	ECDSA	1,248	4 mins
Local System	fTPM	ECSchnorr	1,040	3 mins
Local User	fTPM	ECDSA	15,042	18 mins

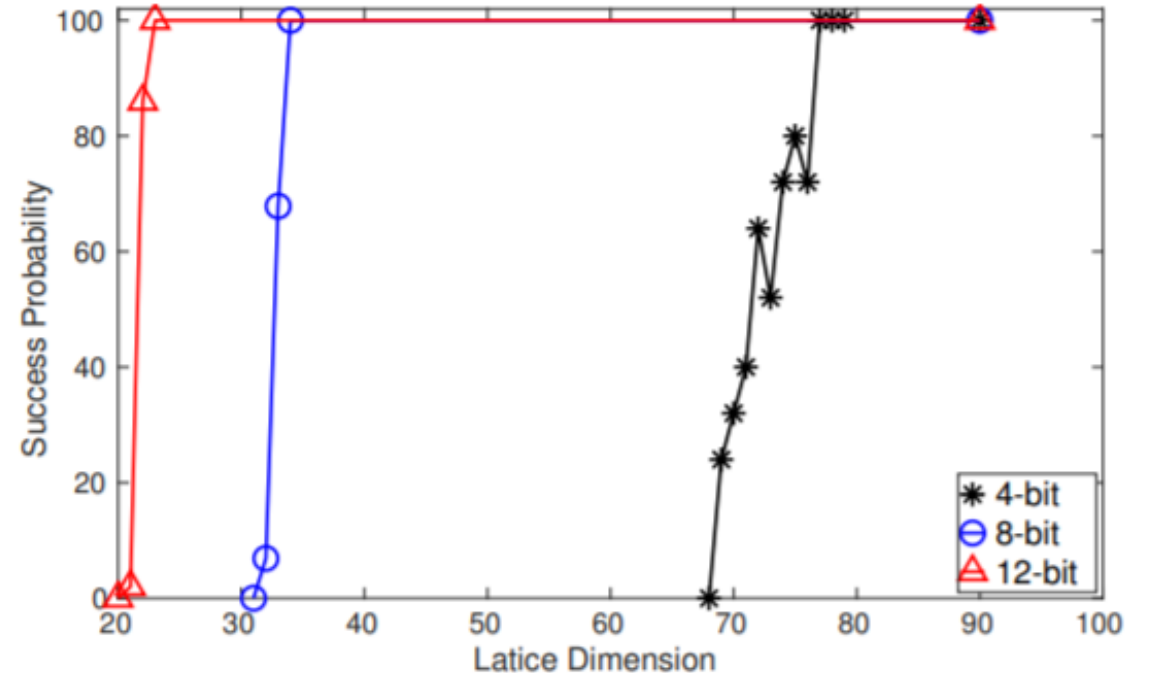

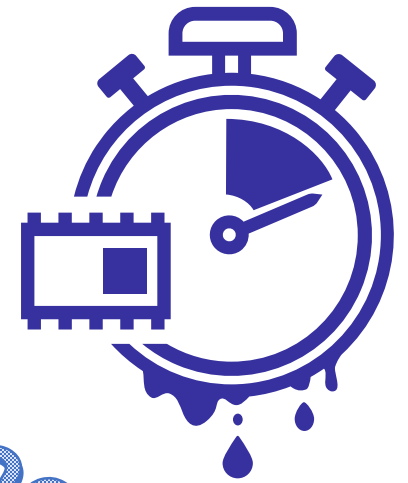

Remote Timing Attacks are Practical

David Brumley
Stanford University
dbrumley@cs.stanford.edu

Dan Boneh
Stanford University
dabo@cs.stanford.edu

Abstract


Timing attacks are usually used to attack weak computing devices such as smartcards. We show that timing attacks apply to general software systems. Specifically, we devise a timing attack against OpenSSL. Our experiments show that we can extract private keys from an OpenSSL-based web server running on a machine in the local network. Our results demonstrate that timing attacks against network servers are practical and therefore security systems should defend against them.

The attacking machine and the server were in different buildings with three routers and multiple switches between them. With this setup we were able to extract the SSL private key from common SSL applications such as a web server (Apache+mod_SSL) and a SSL-tunnel.


Interprocess. We successfully mounted the attack between two processes running on the same machine. A hosting center that hosts two domains on the same machine might give management access to the admins of each domain. Since both domains are hosted on the same machine, one admin could use

TPMs are extremely slow
Remote Timing Attacks are
Practical Again!!!


TPM-Fail Case Study: StrongSwan VPN

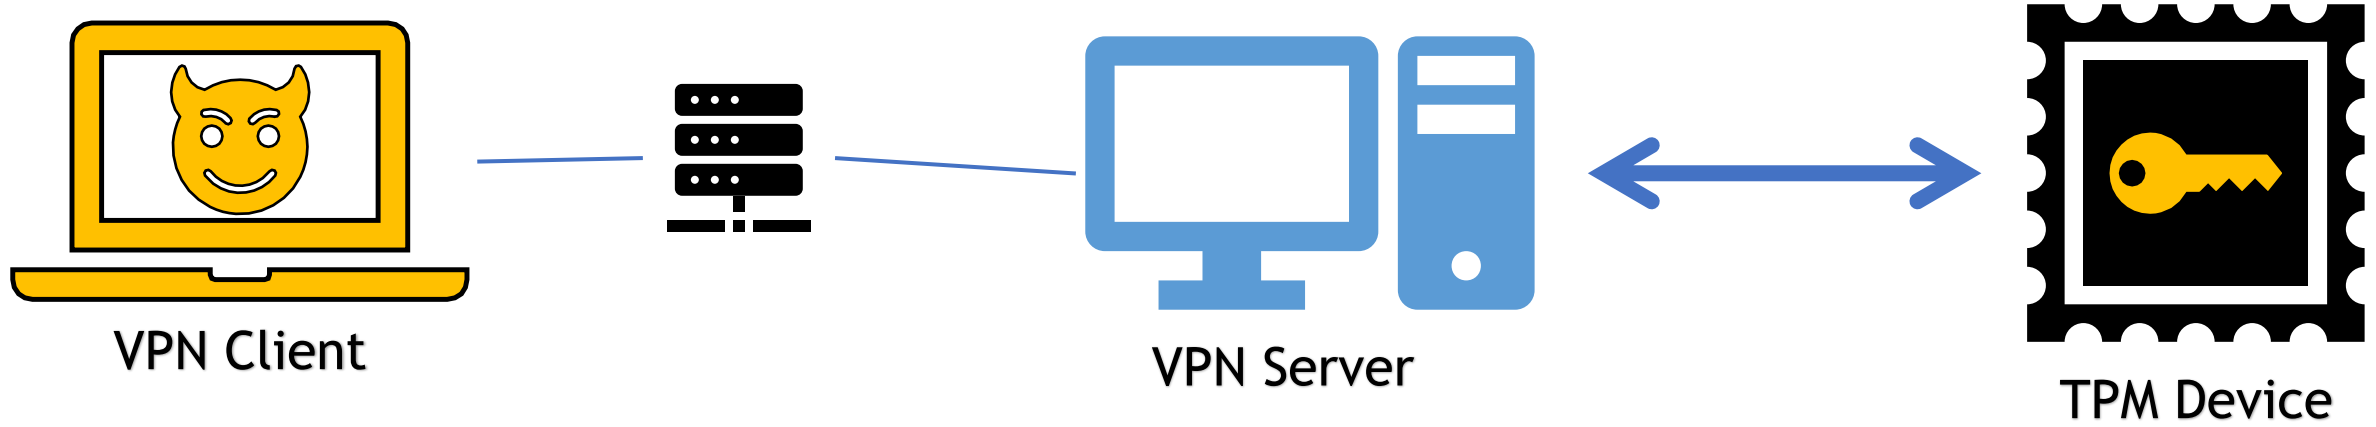


TPM-Fail Case Study: StrongSwan VPN

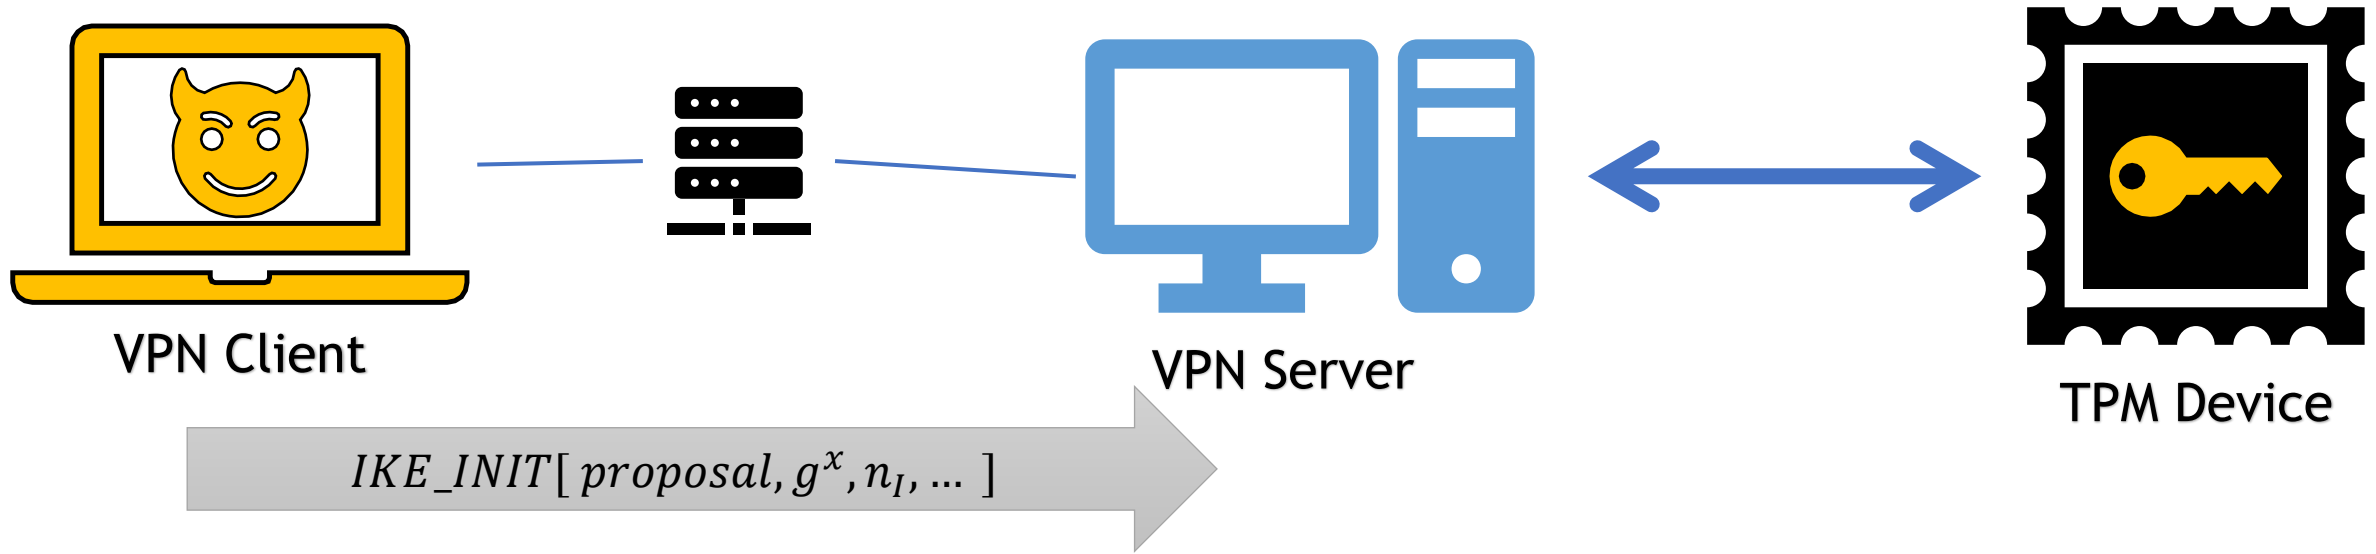


TPM-Fail Case Study: StrongSwan VPN

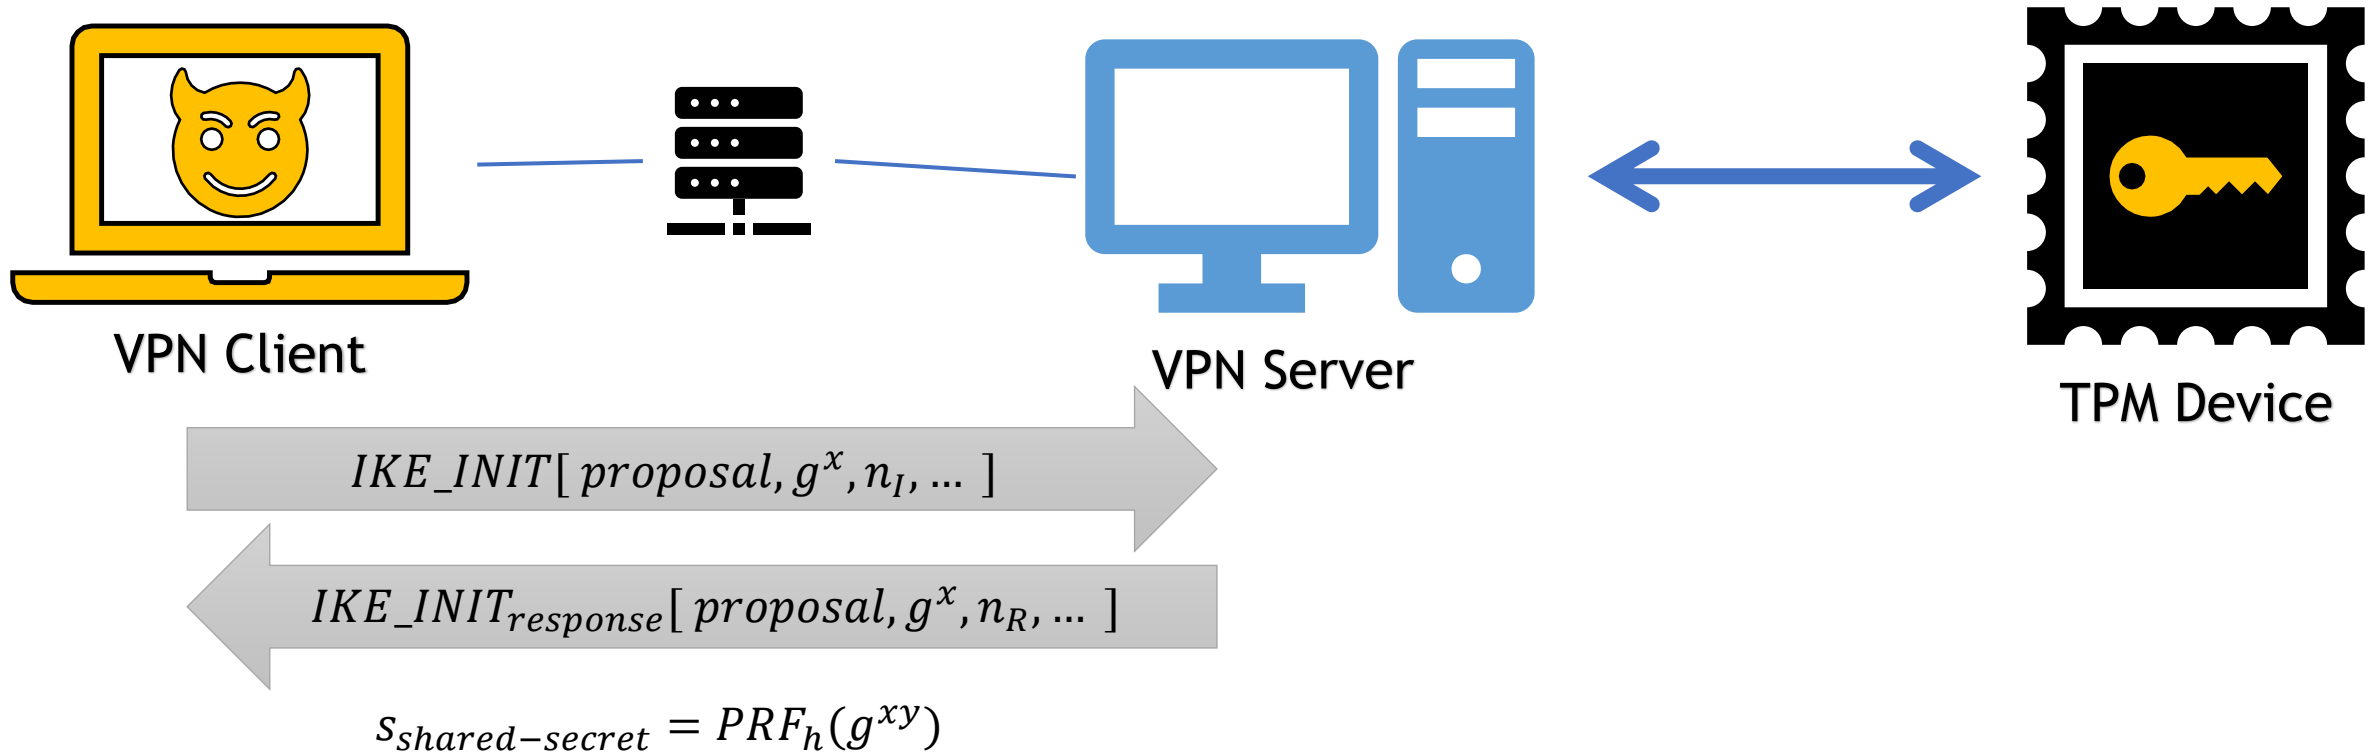


TPM-Fail Case Study: StrongSwan VPN

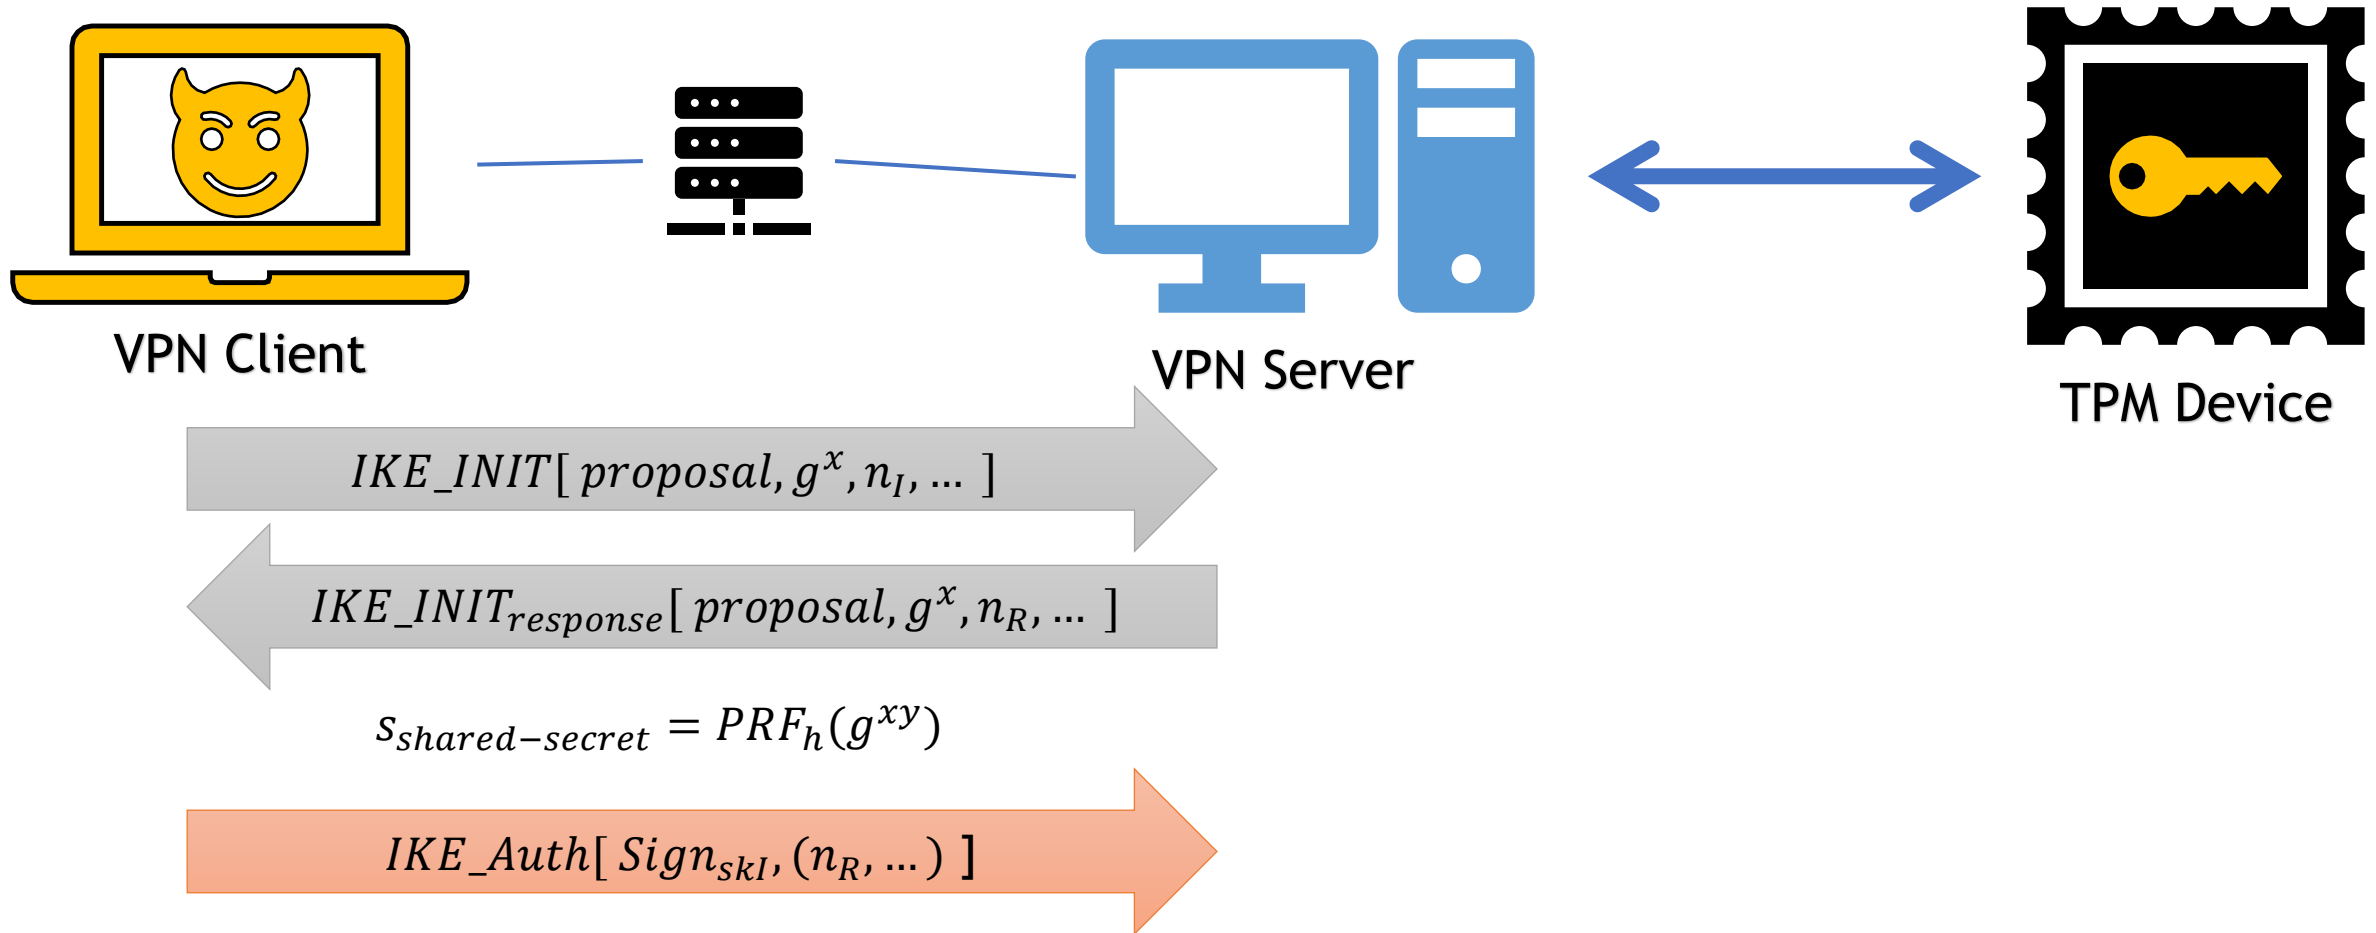


TPM-Fail Case Study: StrongSwan VPN

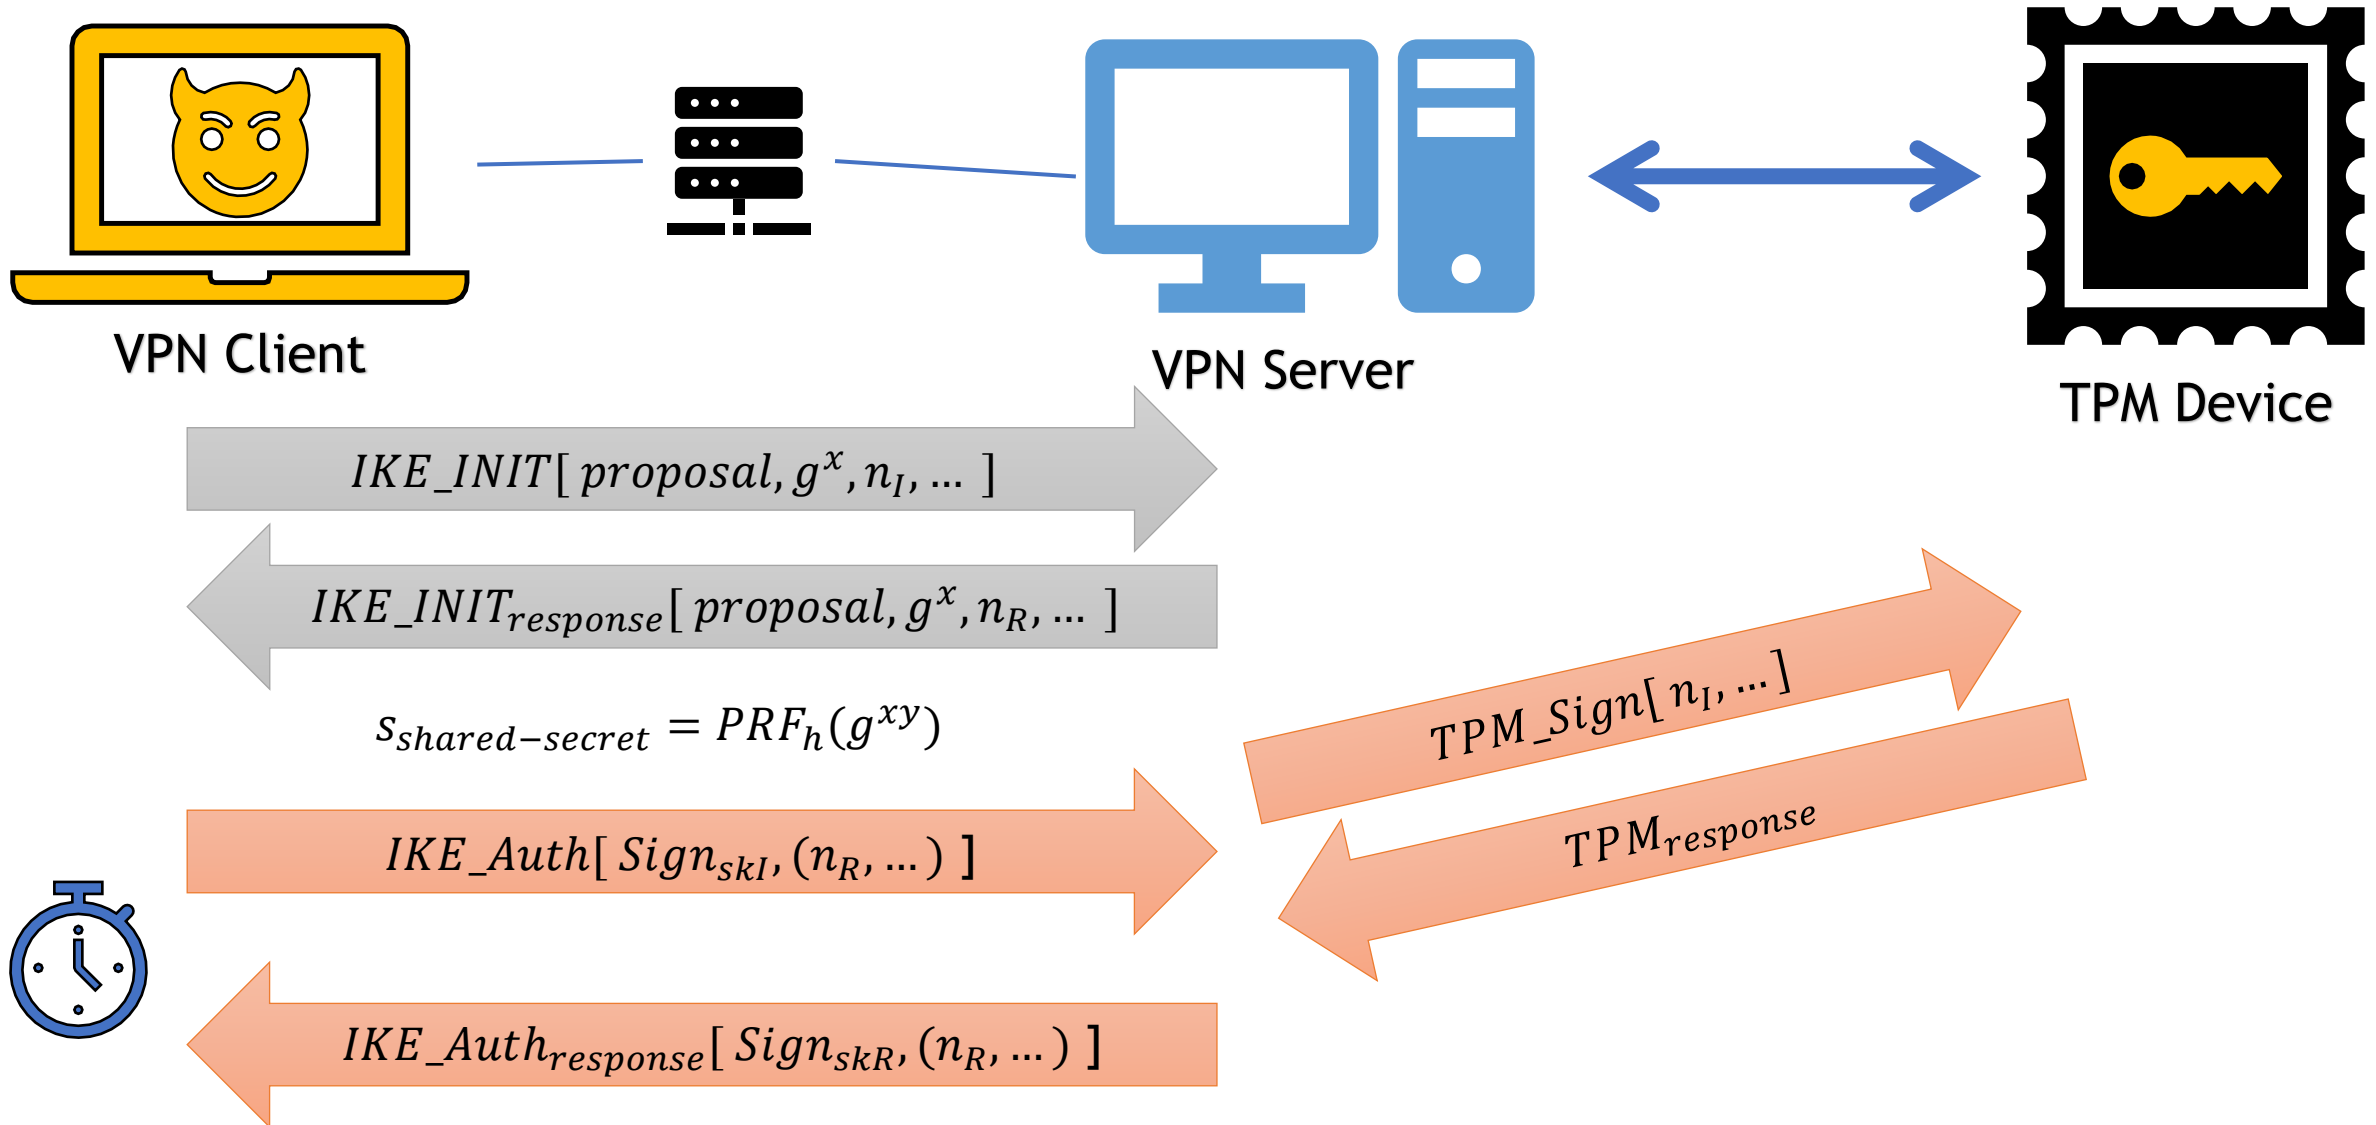

TPM-Fail Case Study: StrongSwan VPN

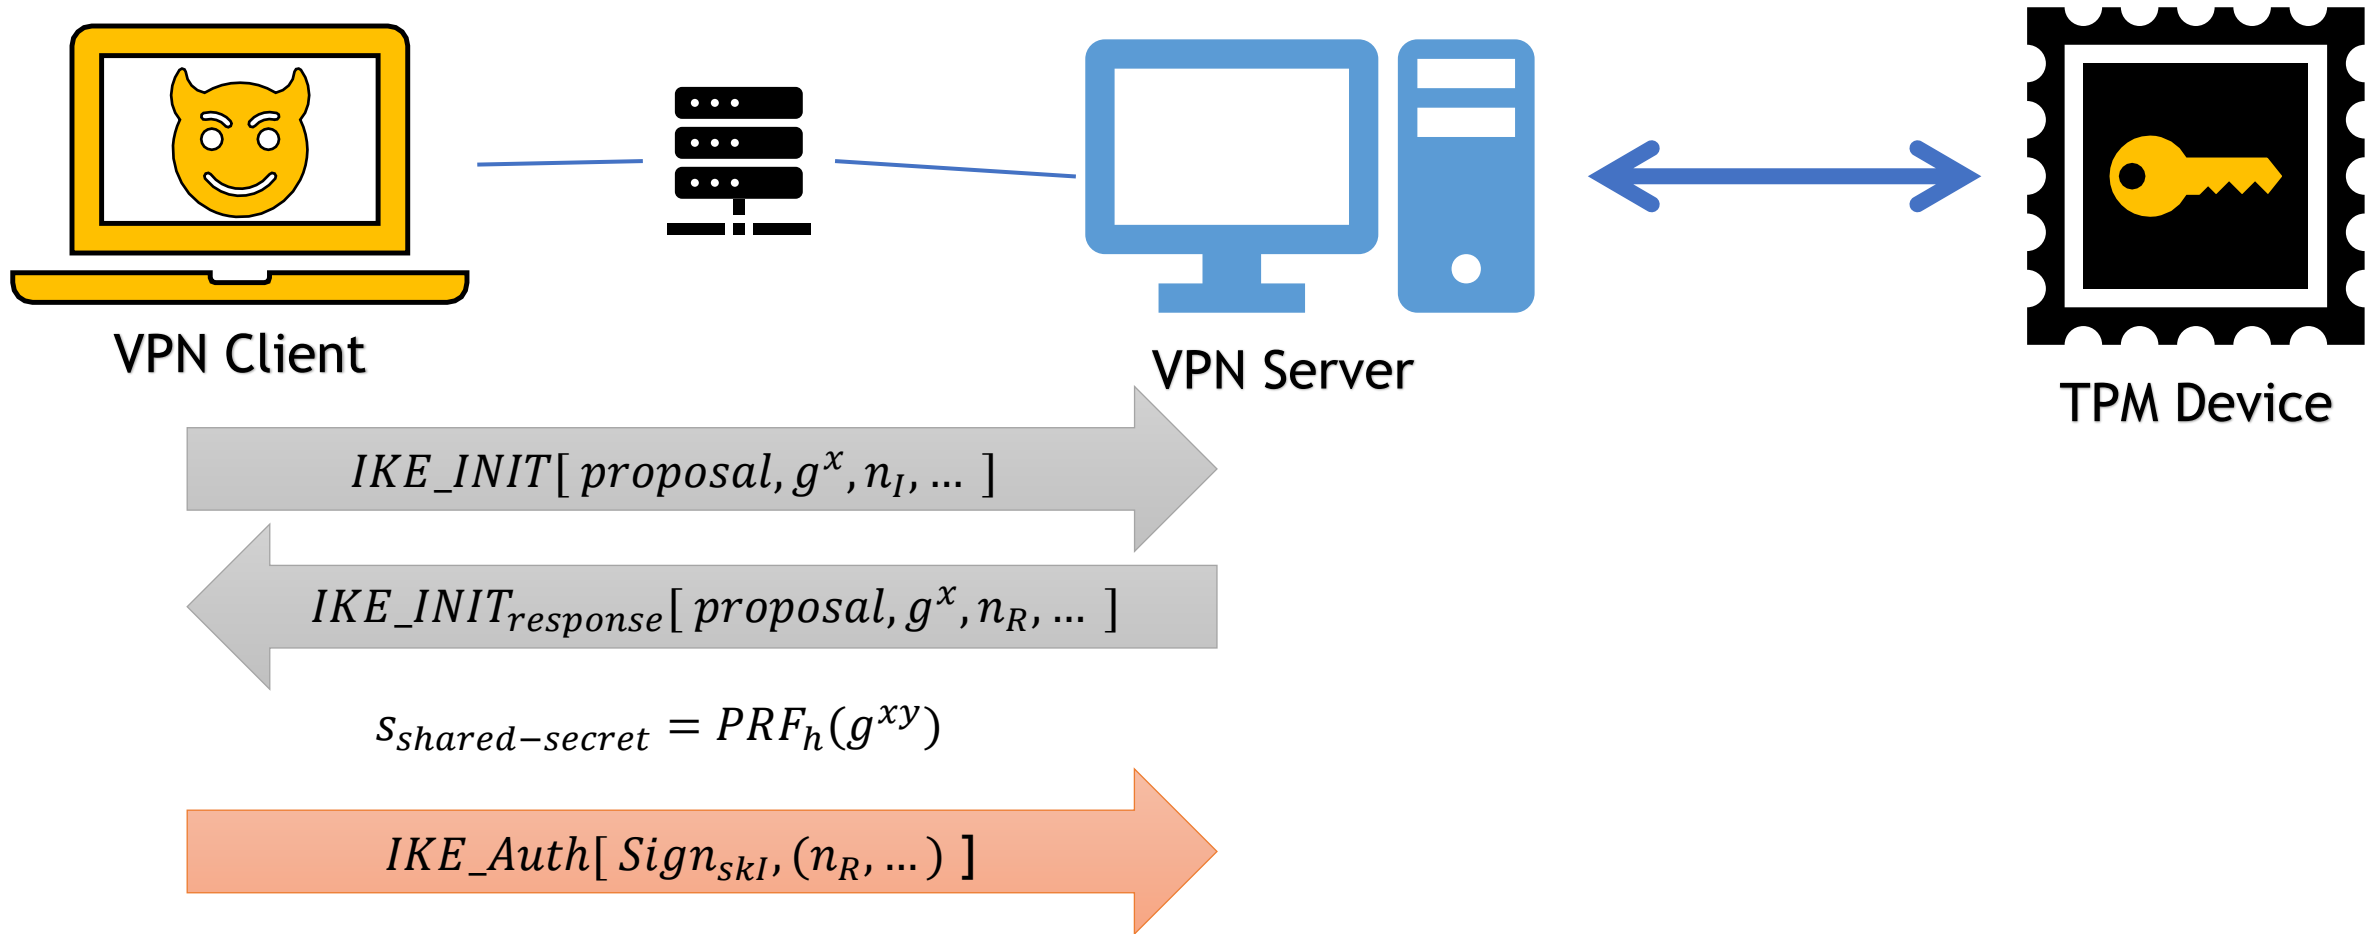


TPM-Fail Case Study: StrongSwan VPN


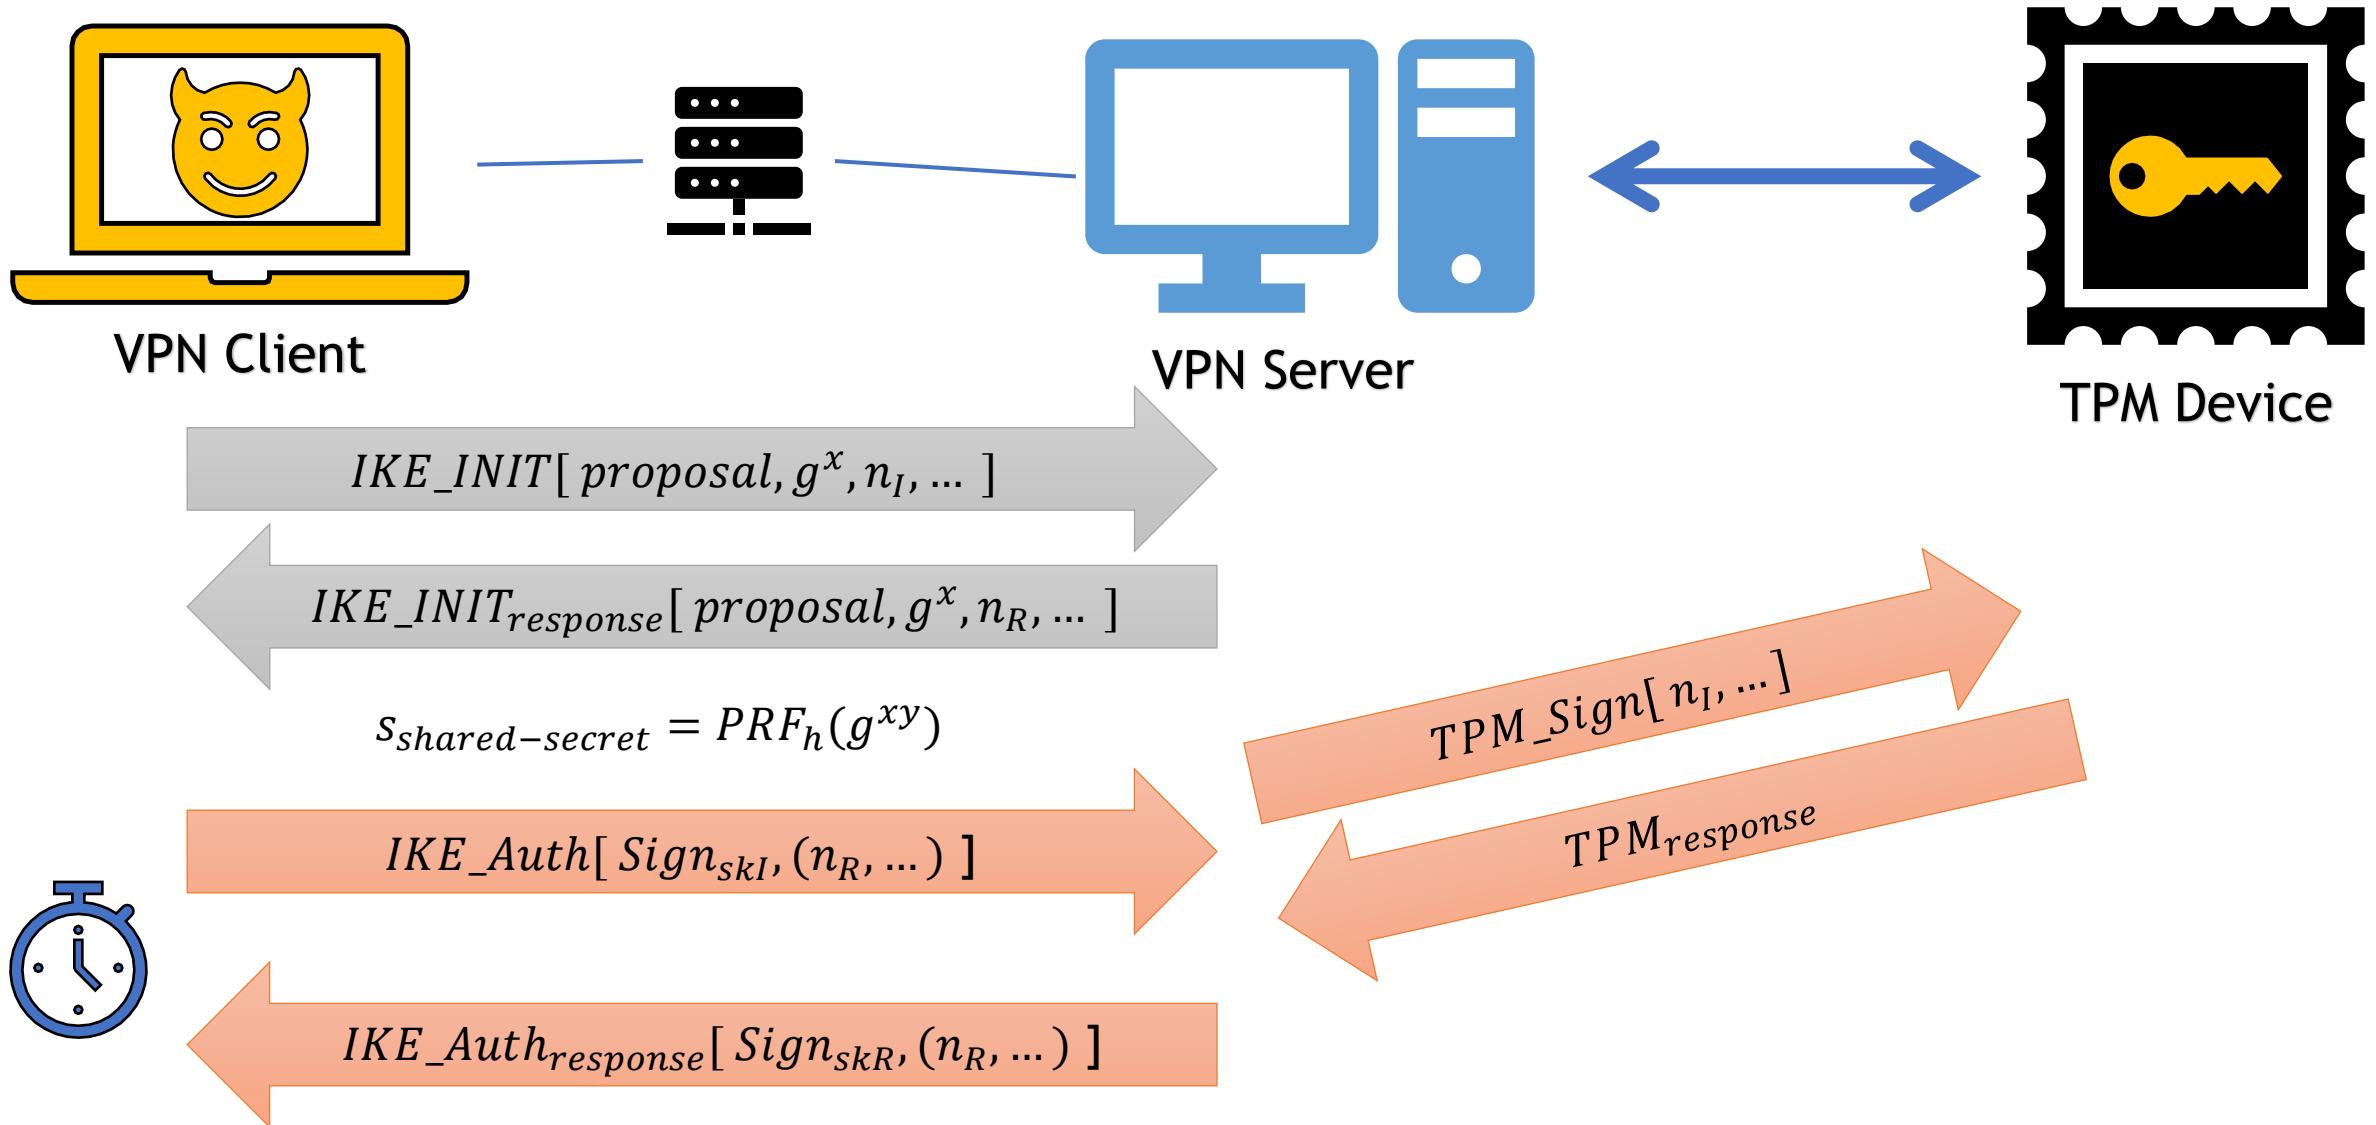


TPM-Fail Case Study: StrongSwan VPN Key Recovery

- Remote Key Recovery after about 44,000 handshake \approx 5 hours


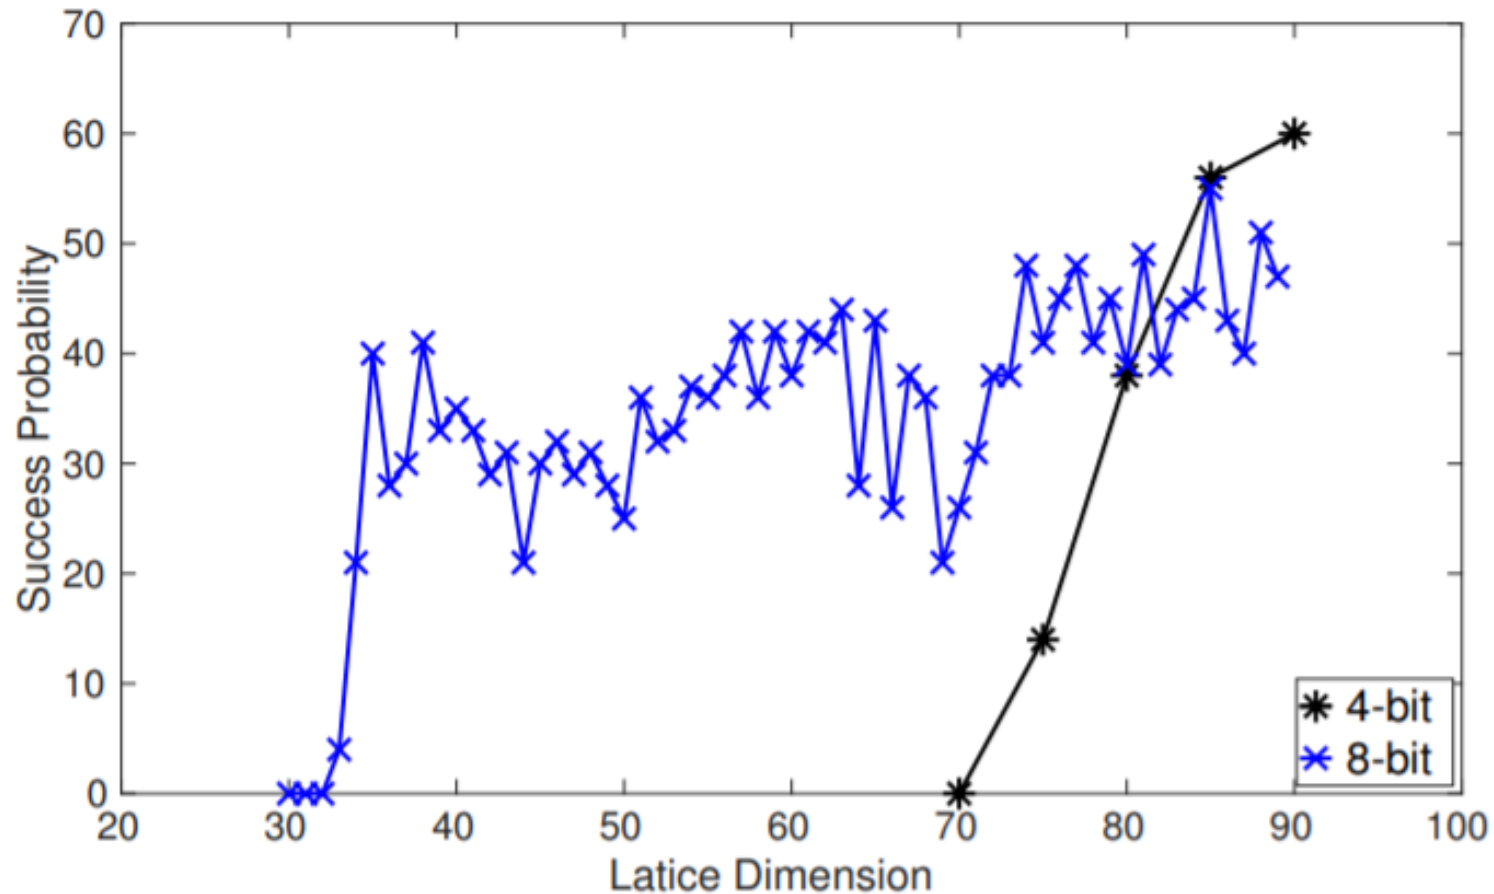


Remote StrongSwan VPN

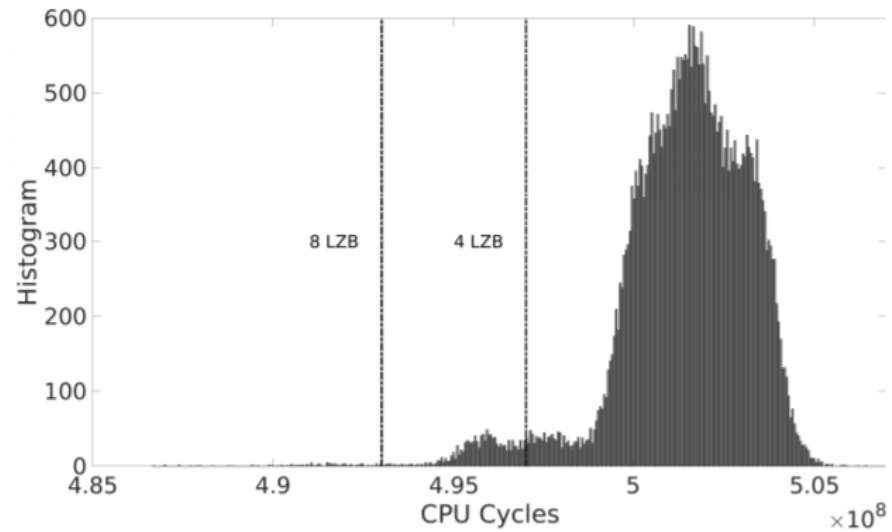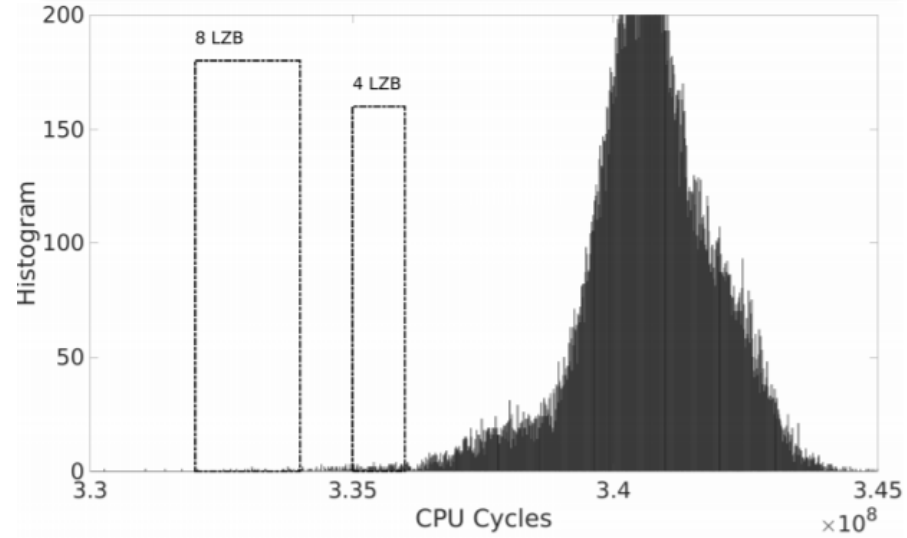

Remote Sample UDP App




User Adversary

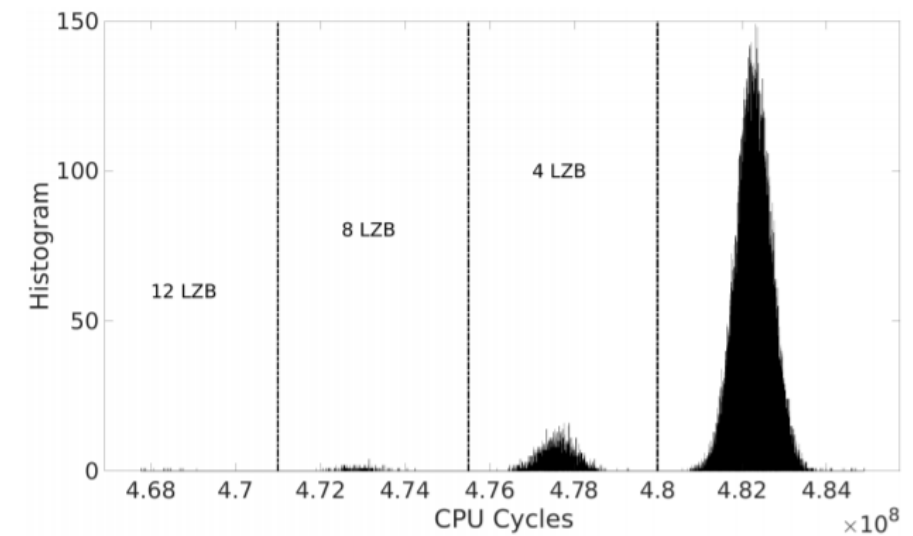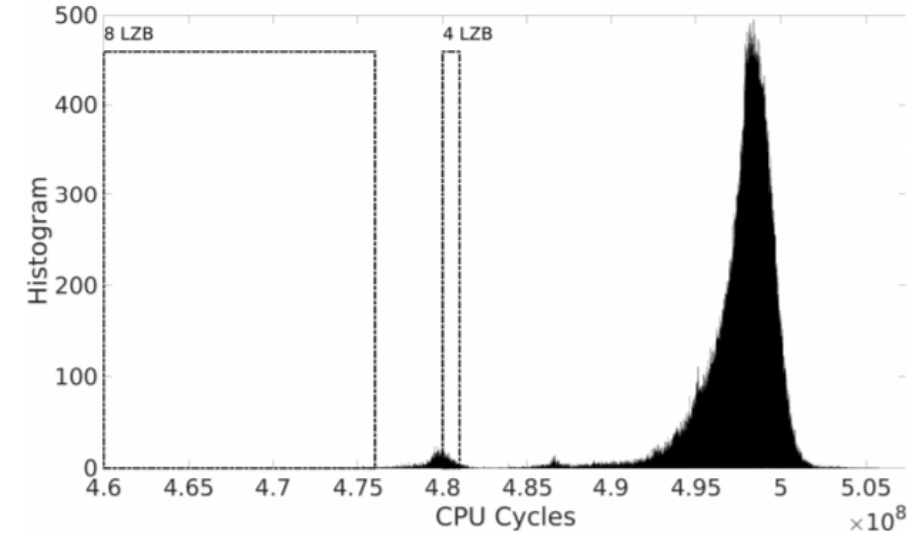

System Adversary

CacheQuote [2]

EPID: algorithms

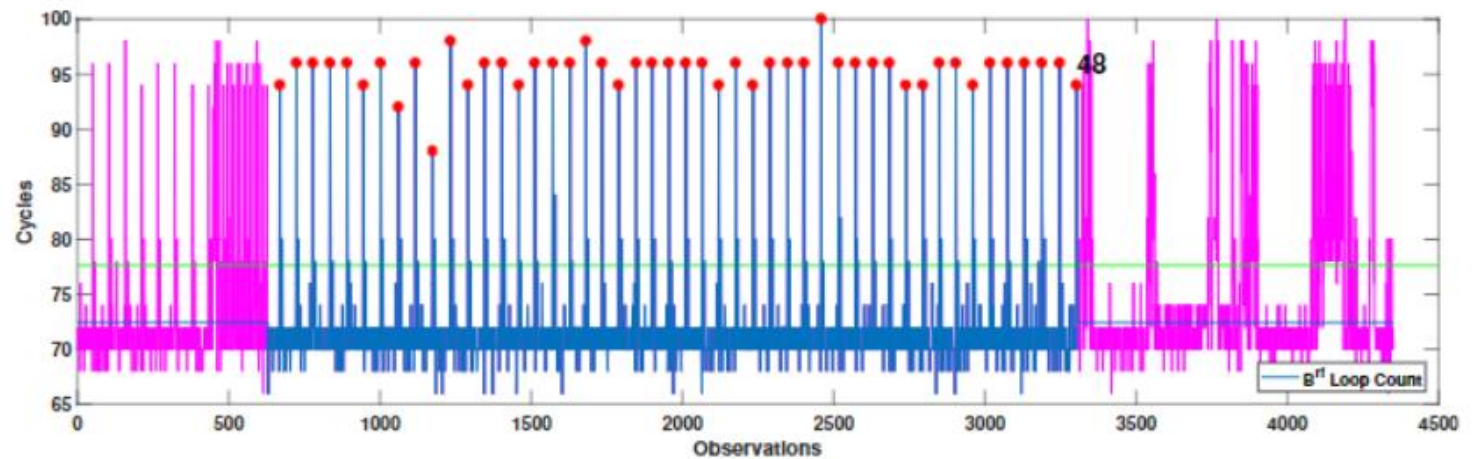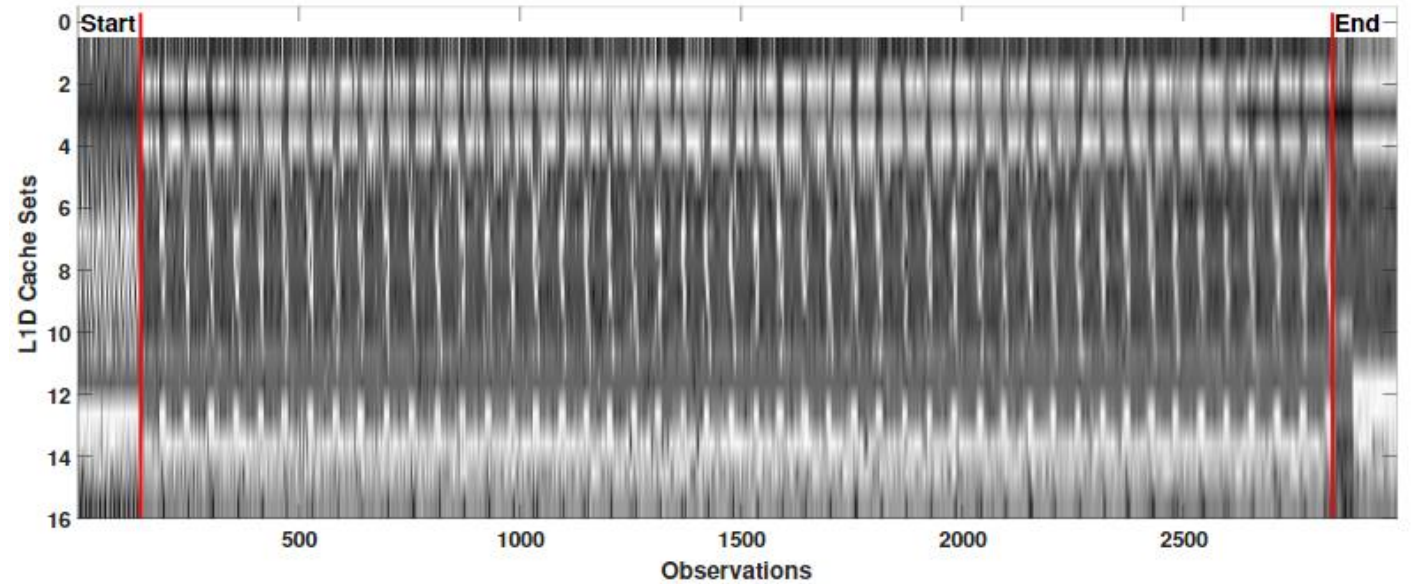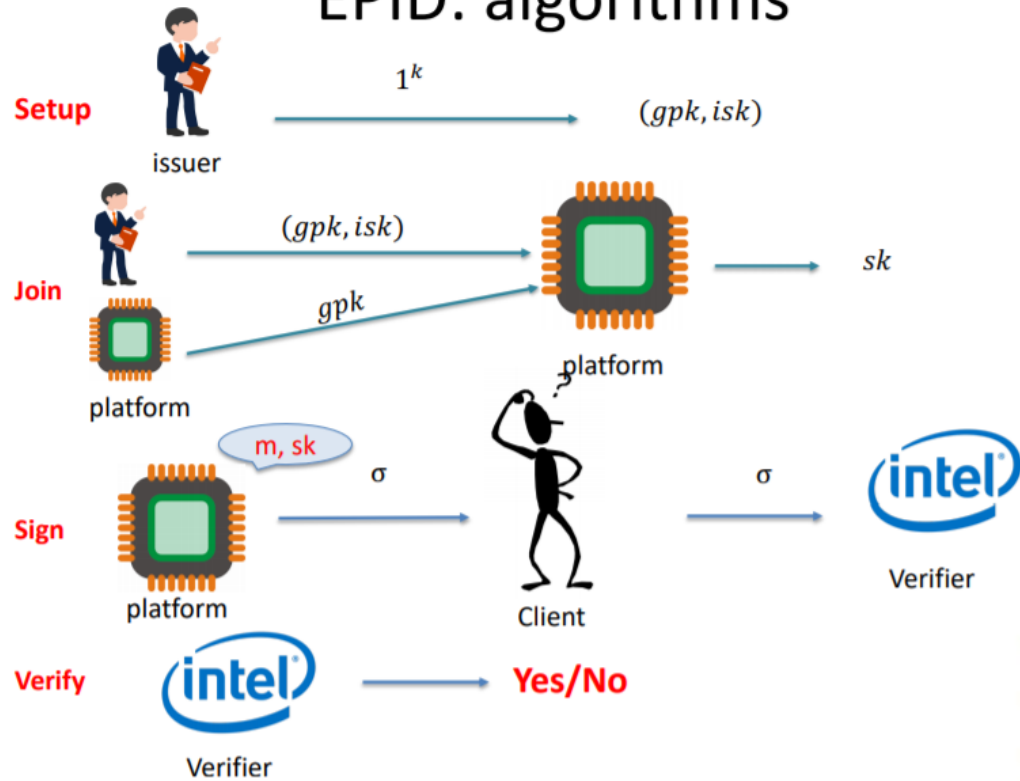

[2] F Dall, G De Micheli, T Eisenbarth, D Genkin, N Heninger, A Moghimi, Y Yarov.
CacheQuote: Efficiently Recovering Long-term Secrets of SGX EPID via Cache Attacks


Cryptographic Implementation is Hard - ECDSA

ECDSA Sign:

$$(x_1, y_1) = k_i \times G$$

$$r_i = x_1 \bmod n$$

$$s_i = k_i^{-1}(z + r_i d) \bmod n$$

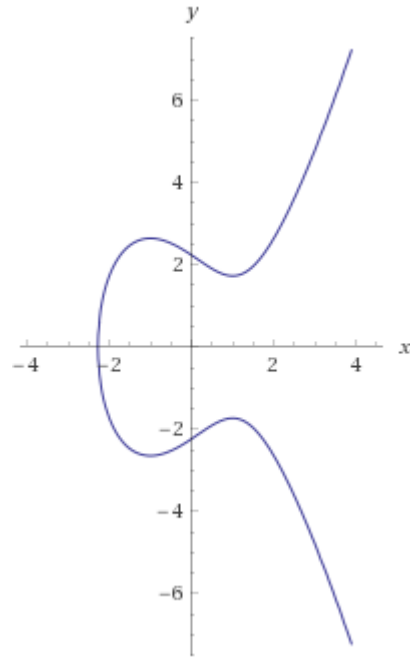

$$y^2 = x^3 - 3x + 5$$


Cryptographic Implementation is Hard - ECDSA

ECDSA Sign:



$$(x_1, y_1) = k_i \times G$$

$$r_i = x_1 \bmod n$$

$$s_i = k_i^{-1}(z + r_i d) \bmod n$$

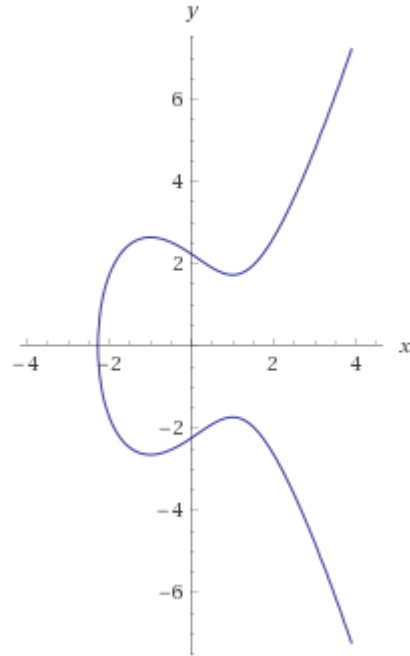

$$y^2 = x^3 - 3x + 5$$

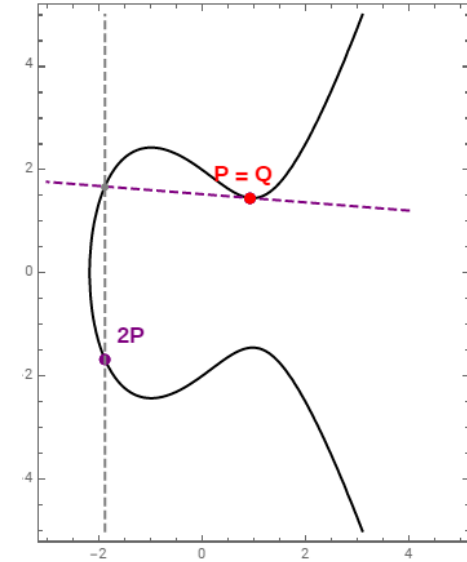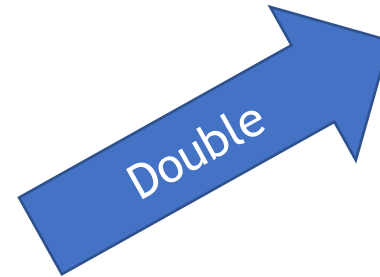

Cryptographic Implementation is Hard - ECDSA






ECDSA Sign:

$$(x_1, y_1) = k_i \times G$$

$$r_i = x_1 \bmod n$$

$$s_i = k_i^{-1}(z + r_i d) \bmod n$$

$$k_i = 3 \rightarrow 3 \times G = 2G + G$$

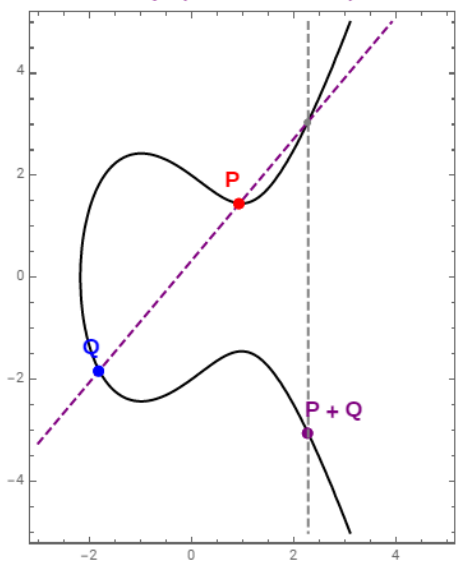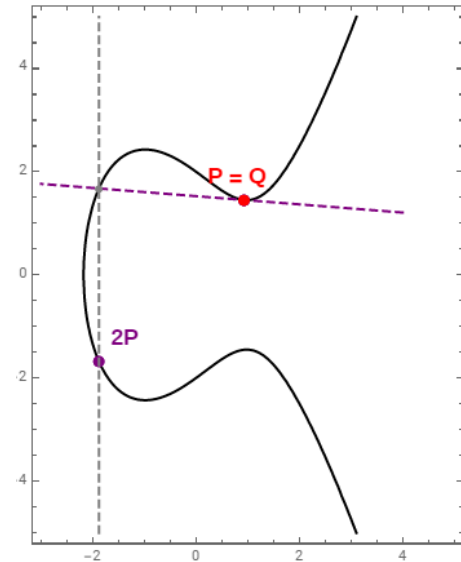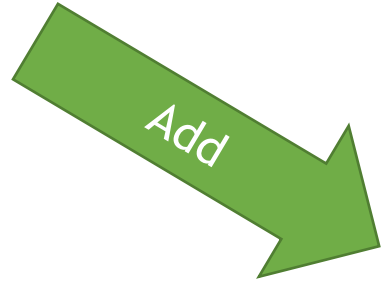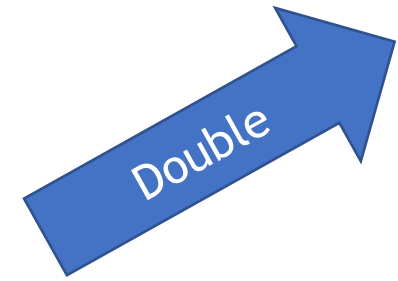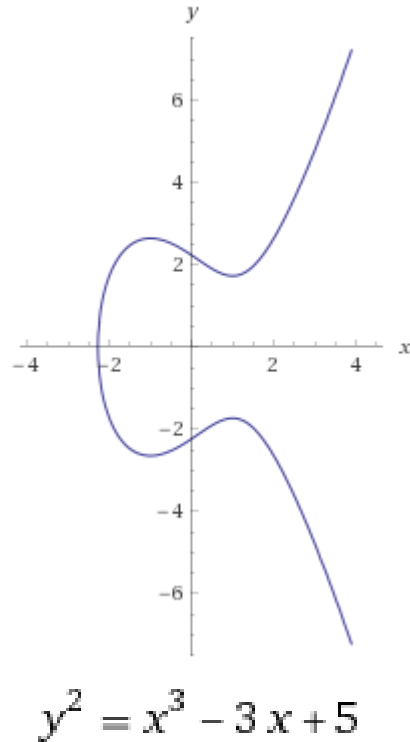

Cryptographic Implementation is Hard - ECDSA

ECDSA Sign:






$$(x_1, y_1) = k_i \times G$$

$$r_i = x_1 \bmod n$$

$$s_i = k_i^{-1}(z + r_i d) \bmod n$$

$$k_i = 3 \rightarrow 3 \times G = 2G + G$$

$$k_i = 7 \rightarrow 7 \times G = 2(2G) + 2G + G$$

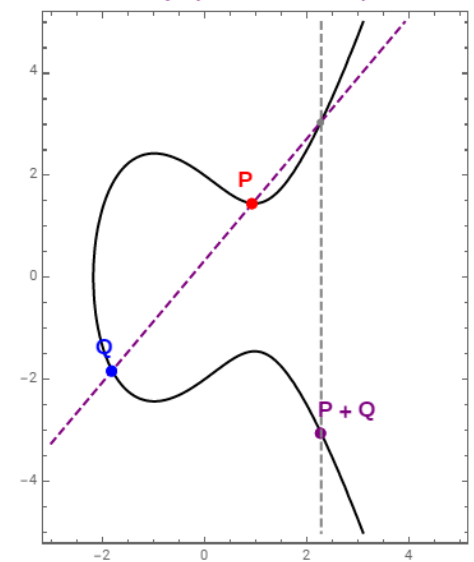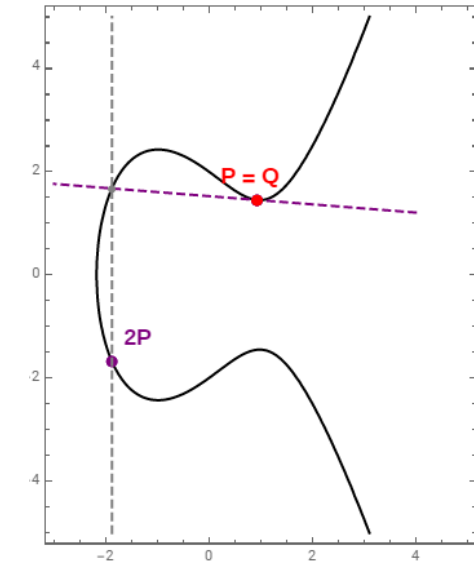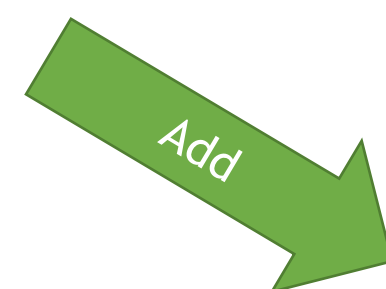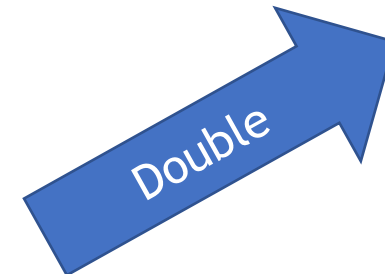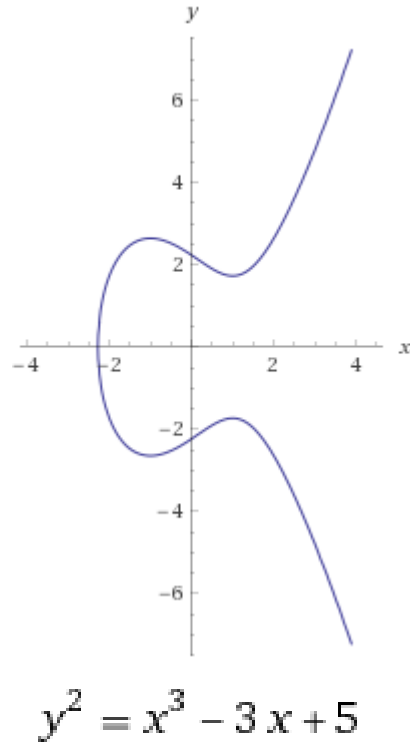

Cryptographic Implementation is Hard - ECDSA

ECDSA Sign:

$$(x_1, y_1) = k_i \times G$$

$$r_i = x_1 \bmod n$$






$$s_i = k_i^{-1}(z + r_i d) \bmod n$$

$$k_i = 3 \rightarrow 3 \times G = 2G + G$$

$$k_i = 7 \rightarrow 7 \times G = 2(2G) + 2G + G$$

$$k_i = 7 \rightarrow 23 \times G$$

$$= 2(2(2(2G) + G) + G) + G$$

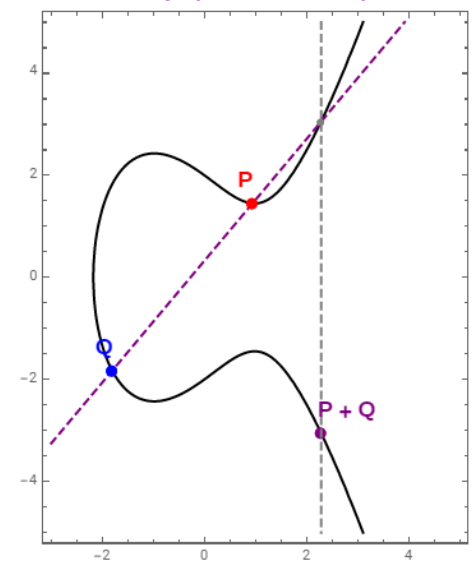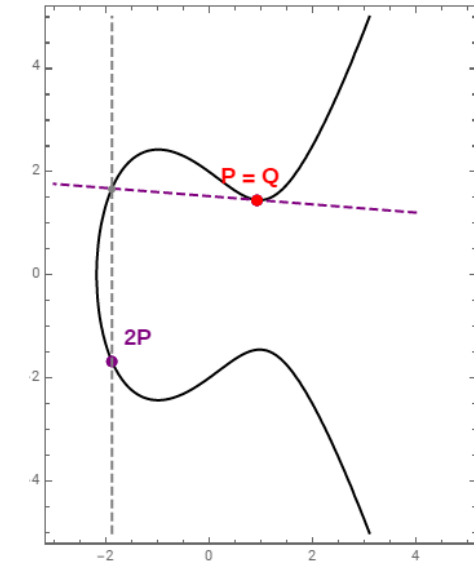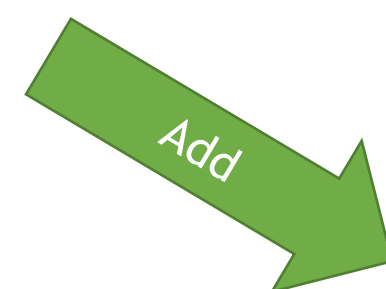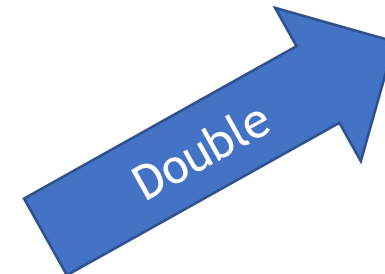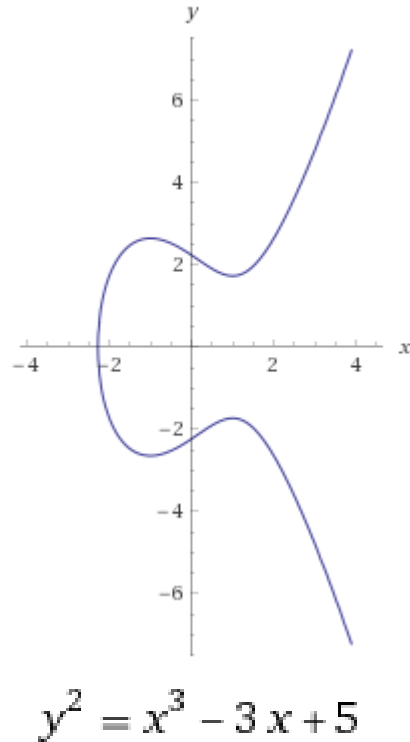

Cryptographic Implementation is Hard - ECDSA

ECDSA Sign:

$$(x_1, y_1) = k_i \times G$$

$$r_i = x_1 \bmod n$$

$$s_i = k_i^{-1}(z + r_i d) \bmod n$$

$$k_i = 3 \rightarrow 3 \times G = 2G + G$$

$$k_i = 7 \rightarrow 7 \times G = 2(2G) + 2G + G$$

$$k_i = 7 \rightarrow 23 \times G$$

$$= 2(2(2(2G) + G) + G) + G$$

//Scalar Mul: Add & Double

Q = 0

R = G






for k_b in k:

 if k_b == 1:

 Q = add(Q, R)

 R = double(R)

return Q

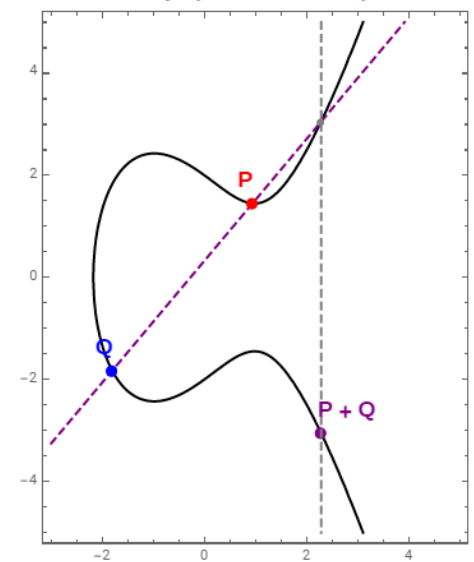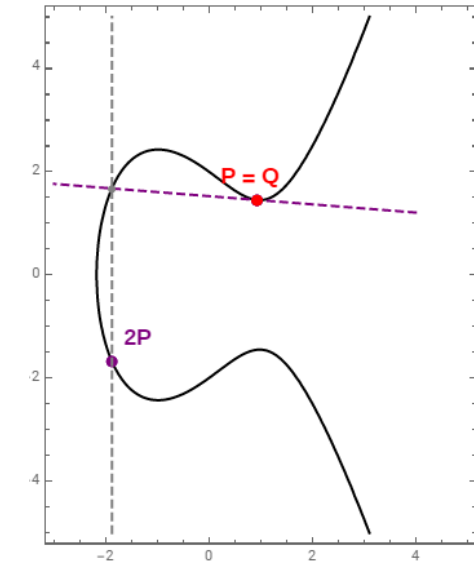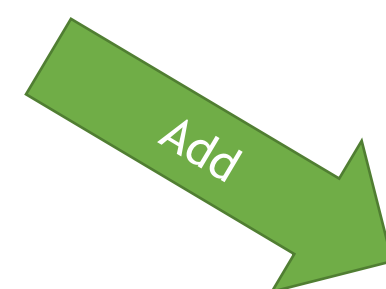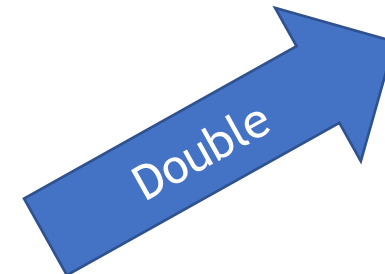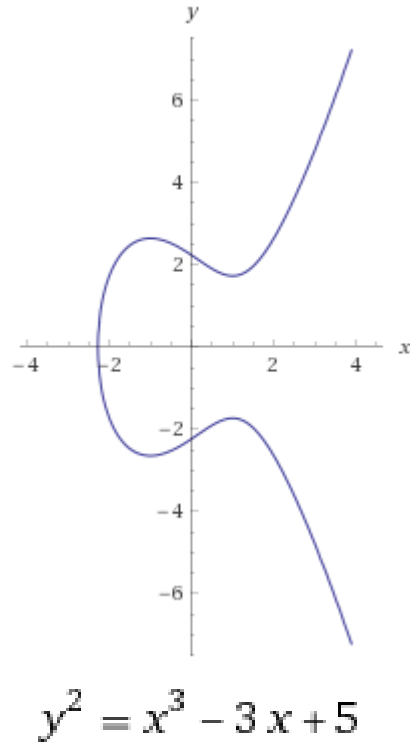

Cryptographic Implementation is Hard

- Many Algorithms to do the same thing
 - Scalar Multiplication
 - Double-Add Algorithm
 - Montgomery Double-Add
 - Sliding Window
 - Fixed Window
- Unclear Threat Model
 - What is a side channel?
 - Power Analysis, Timing, Cache?

Algorithm 1 Fixed Window Scalar Multiplication

```
1:  $T \leftarrow (O, P, 2P, \dots, (2w-1)P)$ 
2: procedure MULPOINT(window size  $w$ , scalar  $k$  represented as  $(k_{m-1}, \dots, k_0)_{2w}$ )
3:    $R \leftarrow T[(k)_{2w}[m-1]]$ 
4:   for  $i \leftarrow m-2$  to  $0$  do
5:     for  $j \leftarrow 1$  to  $w$  do
6:        $R \leftarrow 2R$ 
7:     end for
8:   end for
9:   return  $R$ 
10: end procedure
```

Software Leakages

- Secret Dependent Control Flow

```
for(int i = 0; i < Bitlength(key); ++i)
```

- Secret Dependent Memory Access Pattern

```
state[i] = state[i] ^ sbox[roundKey[i]]
```

- Secret Dependent Timing, *e.g*: *ARM Cortex-M3* umull

MicroWalk Goal


- Automated Analysis
- Dynamic Approach
- Binary-level Analysis:
 - Leakages introduced by compilation
 - Closed-source libraries
- Locate leakage source at Instruction Level

MicroWalk Model

- In practice: Attacker measures
 - Execution time for `(int i = 0; i < bitlength(key); ++i)`
 - Memory usage pattern `state[i] = state[i] ^ sbox[roundKey[i]]`
- In theory: Attacker gets access to execution trace with
 - Executed instructions
 - Branch targets
 - Memory access offsets

MicroWalk Approach

- Generate set of random test cases and capture execution traces
- Analysis A: Compute pairwise diffs

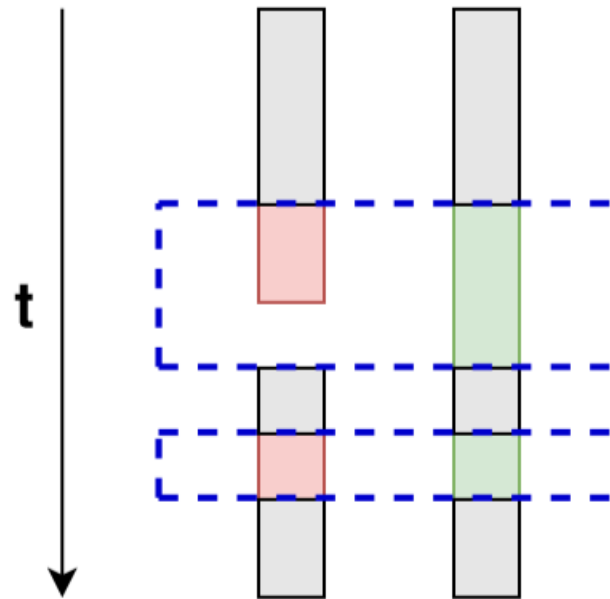


MicroWalk Approach

- Generate set of random test cases and capture execution traces
- Analysis A: Compute pairwise diffs
- Analysis B: Compute mutual information between execution trace and input

```
movzx  esi, al
mov    esi, [r11+rsi*4] ; MutualInformation 7.789
movzx  edi, ah
shr    eax, 10h
mov    r8d, [r11+rdi*4+400h] ; MutualInformation 7.767
movzx  ebp, al
mov    ebp, [r11+rbp*4+800h] ; MutualInformation 7.812
movzx  edi, ah
mov    edi, [r11+rdi*4+0C00h] ; MutualInformation 7.798
movzx  eax, bl
xor    edi, [r11+rax*4] ; MutualInformation 7.796
```


MicroWalk Implementation

- Dynamic binary instrumentation using Intel Pin
- Collect traces while program runs
- Modules:
 - Emulate other CPUs or disable certain capabilities (e.g. AES-NI)
 - Modify RDRAND output

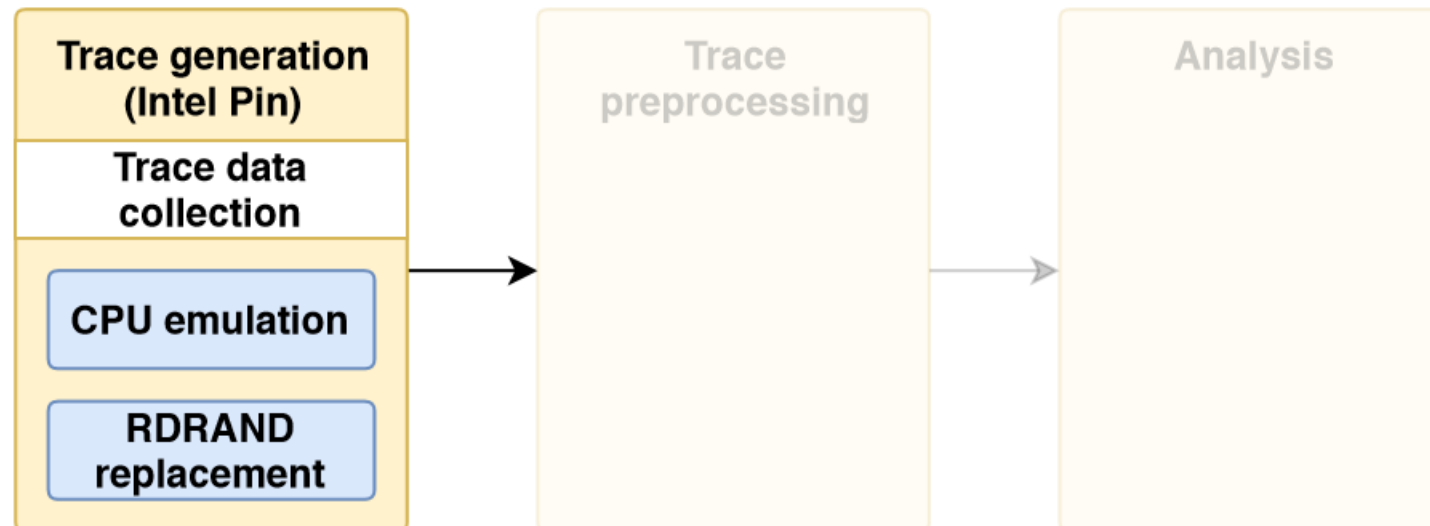


MicroWalk Implementation

- Raw traces only contain absolute addresses of memory accesses
 $0x1111107A \rightarrow \text{sbox}+0x7A$
- Removal of uninteresting trace entries \rightarrow considerable size reduction
- Modules:
 - Configure memory address leakage granularity $0x156F \rightarrow 0x1540$

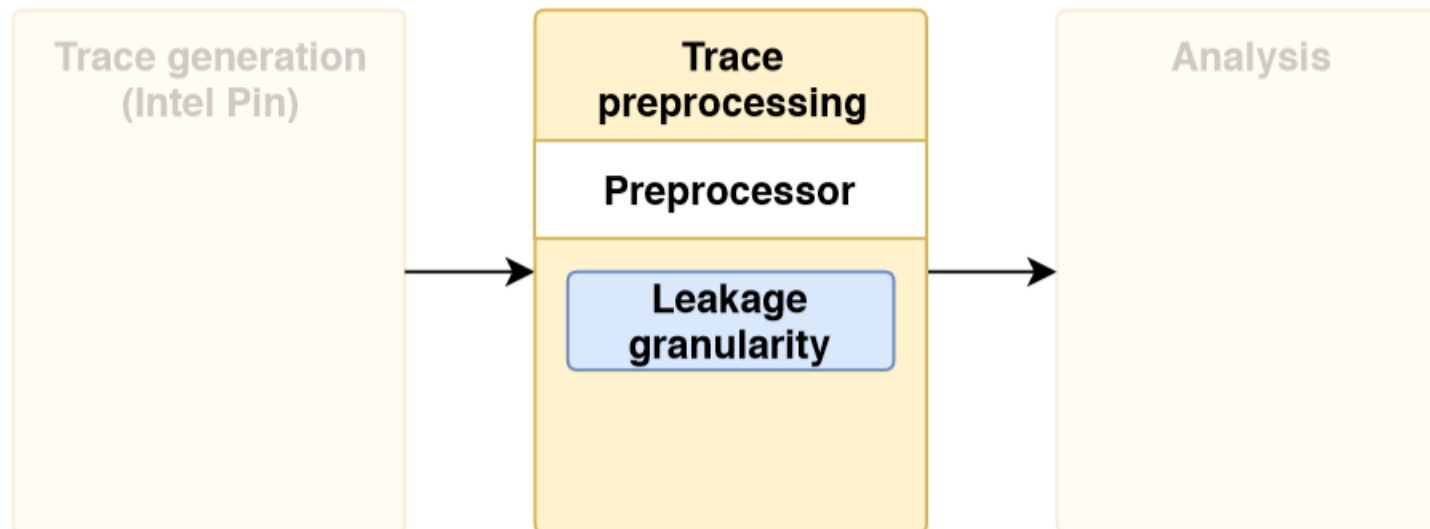

MicroWalk Implementation

- Load and analyze preprocessed traces
- Optionally pass results to visualization stage
- Modules:
 - Compute pairwise trace diffs
 - Calculate mutual information for each memory accessing instruction

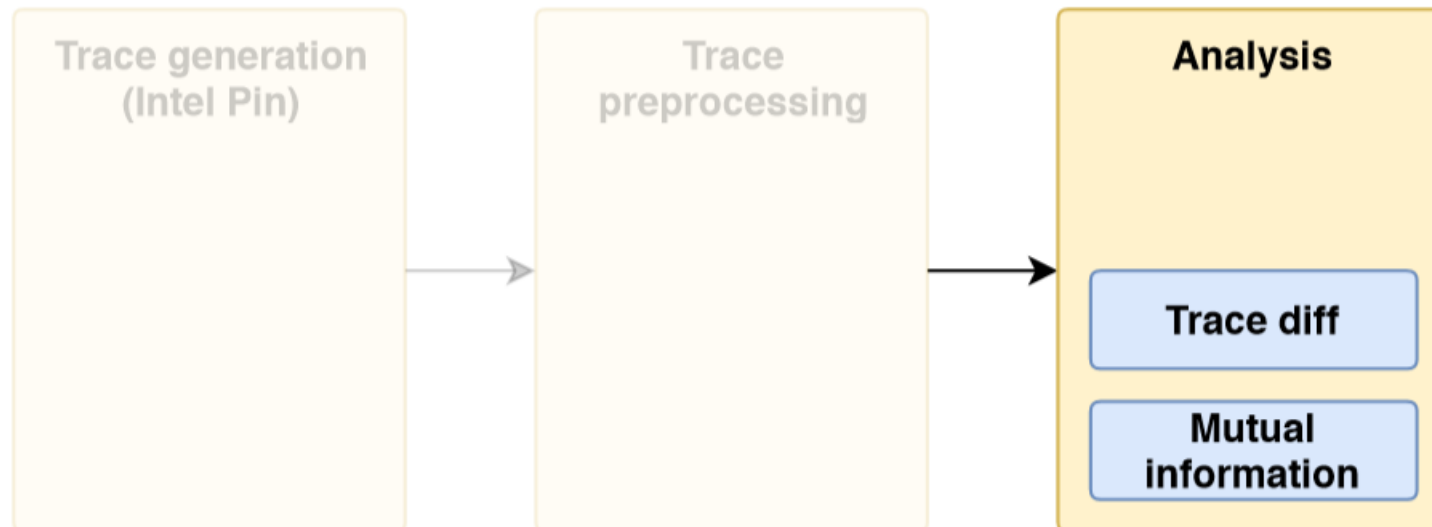


MicroWalk Leakage Model

- Page Table \Rightarrow leaks 4 KB memory access
- Data Cache \Rightarrow leaks 64 B data access
- Memory Order Buffer \Rightarrow leaks 4 B data access
- Cache Banks \Rightarrow leaks 8 B data access
- Branch Target Buffer \Rightarrow which branch is executed
- Instruction Cache \Rightarrow which instructions are executed


Coordinated Disclosure - STMicroelectronics

- STMicroelectronics (CVE-2019-16863)
 - 05/15/2019: Reported to ST
 - 05/17/2019: Acknowledged
 - Lots of calls/emails to clarify the disclosure process
 - 09/12/2019: Verified new version of STM TPM firmware
 - After 11/12/2019:
 - HP and Lenovo have issued firmware updates.
 - ST released a list of affected devices.

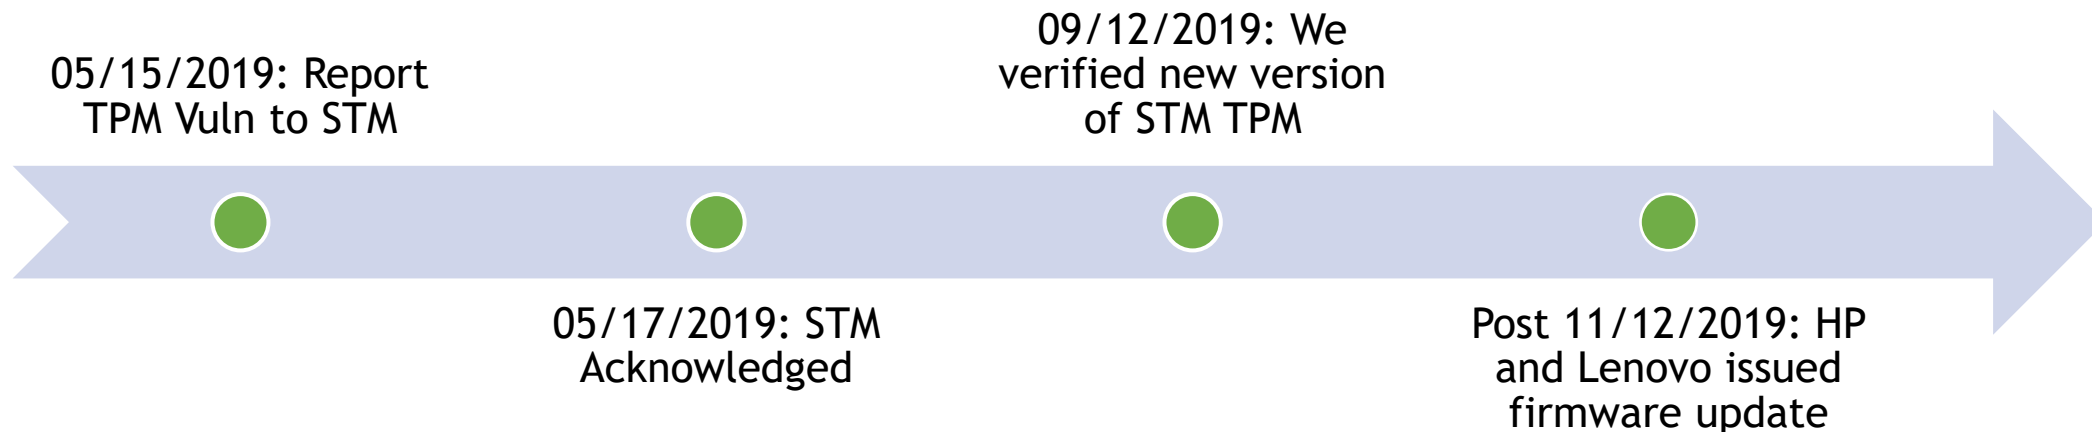

Coordinated Disclosure - Intel

- Intel (CVE-2019-11090)
 - 02/01/2019: Reported to IPSIRT
 - 02/12/2019: Acknowledged (Outdated Intel IPP Crypto library)
 - 11/12/2019: Firmware Update for Intel Management Engine

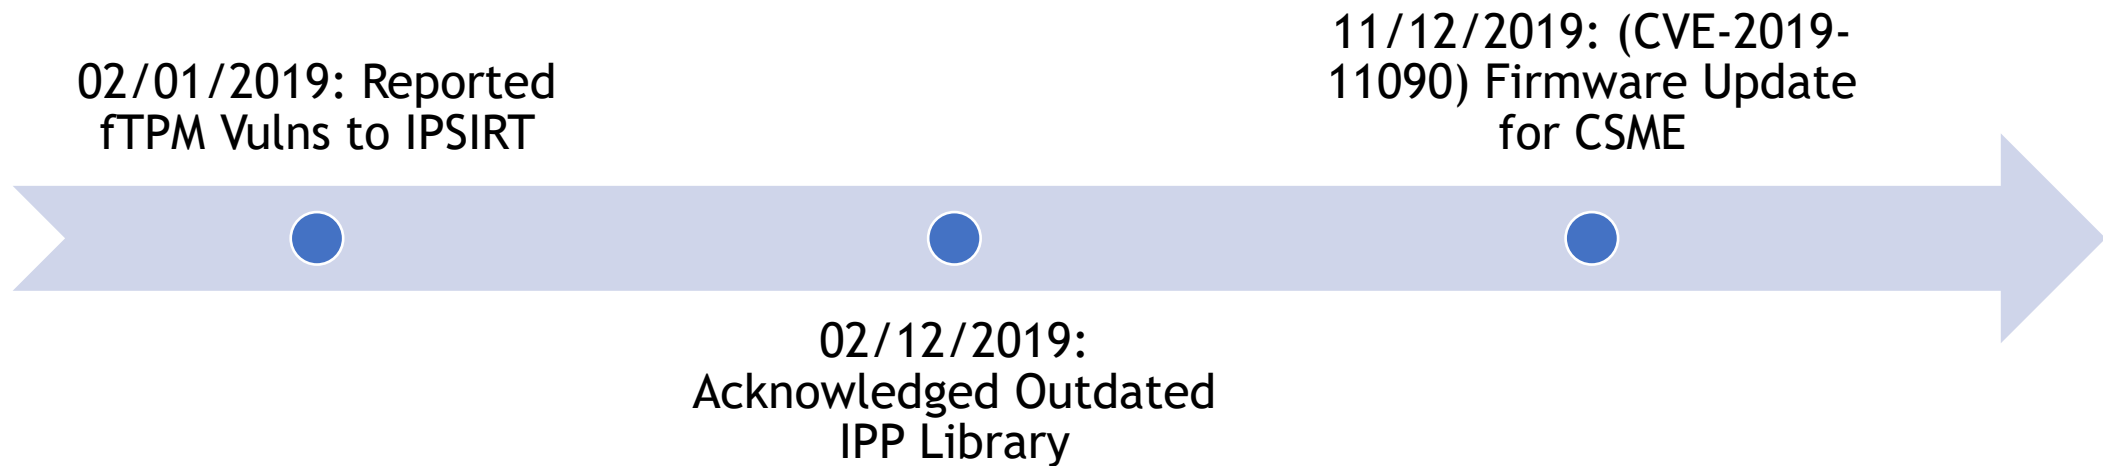


MicroWalk Analysis Results

- Rigorous Analysis of two Closed-source Libraries

	# Instructions	Analysis Time	# Leakages
Intel IPP	91208722	73 min	13 (2)
Microsoft CNG	21133239	31 min	4 (2)

- Intel IPP CVEs

- CVE-2018-12155
- CVE-2018-12156

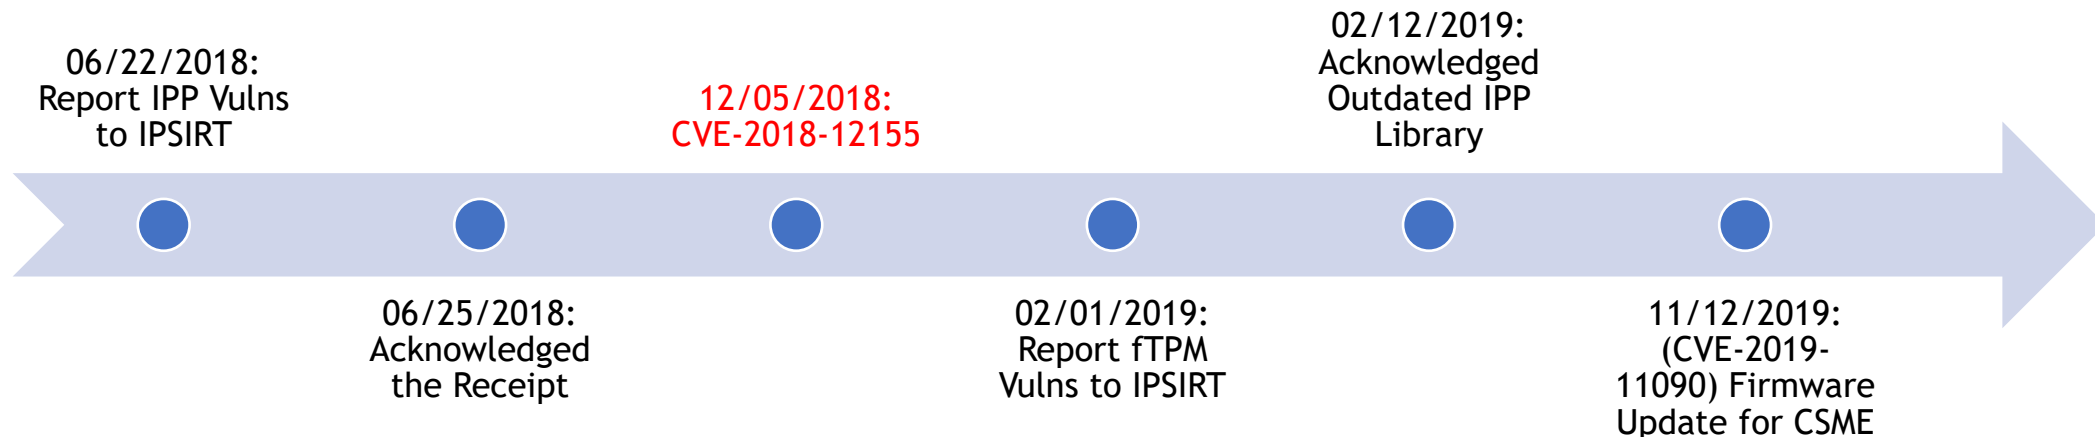

Thanks!

- Berk Sunar @ WPI
- Nadia Heninger @ UCSD
- Thomas Eisenbarth @ UzL
- Jan Wichelmann @ UzL




Questions?!




Daniel Moghimi

@danielmgmi

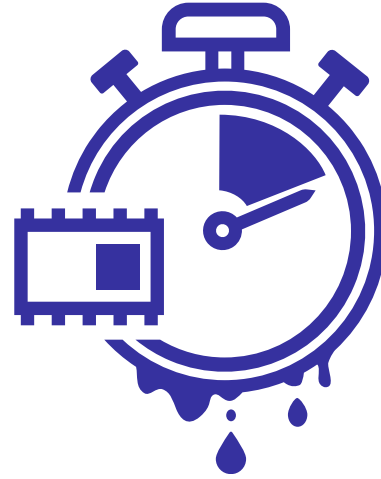

TPM-FAIL


<https://tpm.fail/>

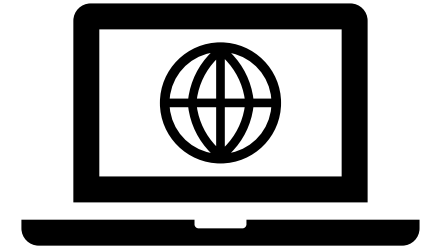

[https://github.com/
VernamLab/TPM-Fail](https://github.com/VernamLab/TPM-Fail)

29TH USENIX
SECURITY SYMPOSIUM

<https://www.usenix.org/conference/usenixsecurity20/presentation/moghimi>

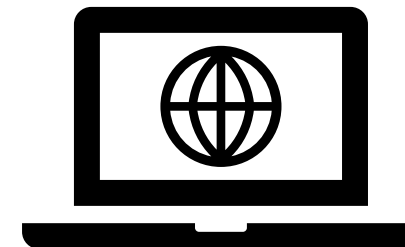

[https://github.com/
UzL-ITS/Microwalk](https://github.com/UzL-ITS/Microwalk)